





DSD-E1 : Deep, single tube drills with external 2 and 4 start thread connection and a brazed single tip. Each item represents a diameter specific head diameter, an order form should be filled out.

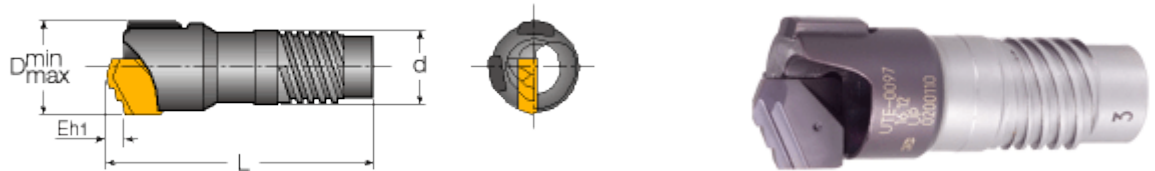

NOM 0 refers to non-coated drill head, NOM 2 refers to coated drill head.



Designation	D min	D max	L	d	Eh1	Threads	Ts
DSD-E1 12.60-13.60 NOM 0	12.60	13.60	42.50	9.60	2.3	2	TS-I01
DSD-E1 12.60-13.60 NOM 2	12.60	13.60	42.50	9.60	2.3	2	TS-I01
DSD-E1 13.61-14.60 NOM 0	13.61	16.60	42.70	10.60	2.4	2	TS-I02
DSD-E1 13.61-14.60 NOM 2	13.61	16.60	42.70	10.60	2.4	2	TS-I02
DSD-E1 15.60-16.70 NOM 0	15.60	16.70	42.70	11.60	2.4	2	TS-I03
DSD-E1 15.60-16.70 NOM 2	15.60	16.70	42.70	11.60	2.4	2	TS-I03
DSD-E1 14.61-15.59 NOM 0	16.61	15.59	43.20	12.60	3.0	4	TS-I0
DSD-E1 14.61-15.59 NOM 2	16.61	15.59	43.20	12.60	3.0	4	TS-I0
DSD-E1 16.71-17.70 NOM 0	16.71	17.70	43.20	13.60	3.0	4	TS-I1
DSD-E1 16.71-17.70 NOM 2	16.71	17.70	43.20	13.60	3.0	4	TS-I1
DSD-E1 17.71-18.90 NOM 0	17.71	18.90	43.60	14.50	3.3	4	TS-I2
DSD-E1 17.71-18.90 NOM 2	17.71	18.90	43.60	14.50	3.3	4	TS-I2
DSD-E1 18.91-20.00 NOM 0	18.91	20.00	43.60	15.50	3.3	4	TS-I3
DSD-E1 18.91-20.00 NOM 2	18.91	20.00	43.60	15.50	3.3	4	TS-I3

The drill tip is supplied in a grade that is suitable to machine the material group indicated in the drill head designation: P-Steel M-Stainless Steel K-Cast Iron.

For quotation form and user guide click on "More Info".