





DSC-E1 : Deep single tube counterborer with through hole, external 4 start thread connection and a brazed tip. Each item represents. For a specific head diameter, an order form should be filled out.

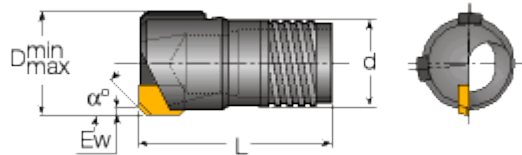

NOM 0 refers to non-coated drill head, NOM 2 refers to coated drill head.



Designation	D min	D max	a°	Ew1	L	d	Ts
DSC-E1 18.91-20.00 NOM 0	18.91	20.00	20/45	1.0	57.00	15.50	TS-I3
DSC-E1 18.91-20.00 NOM 2	18.91	20.00	20/45	1.0	57.00	15.50	TS-I3
DSC-E1 20.01-21.80 NOM 0	20.01	21.80	20/45	2.0	65.00	16.00	TS-I4
DSC-E1 20.01-21.80 NOM 2	20.01	21.80	20/45	2.0	65.00	16.00	TS-I4
DSC-E1 21.81-24.10 NOM 0	21.81	24.10	20/45	2.0	65.00	18.00	TS-I5
DSC-E1 21.81-24.10 NOM 2	21.81	24.10	20/45	2.0	65.00	18.00	TS-I5
DSC-E1 24.11-26.40 NOM 0	24.11	26.40	20/45	2.0	65.00	19.50	TS-I6
DSC-E1 24.11-26.40 NOM 2	24.11	26.40	20/45	2.0	65.00	19.50	TS-I6
DSC-E1 26.41-28.70 NOM 0	26.41	28.70	20/45	2.0	65.00	21.00	TS-I7
DSC-E1 26.41-28.70 NOM 2	26.41	28.70	20/45	2.0	65.00	21.00	TS-I7
DSC-E1 28.71-31.00 NOM 0	28.71	31.00	20/45	2.0	70.00	23.50	TS-I8
DSC-E1 28.71-31.00 NOM 2	28.71	31.00	20/45	2.0	70.00	23.50	TS-I8
DSC-E1 31.01-33.30 NOM 0	31.01	33.30	20/45	3.0	70.00	25.50	TS-I9
DSC-E1 31.01-33.30 NOM 2	31.01	33.30	20/45	3.0	70.00	25.50	TS-I9
DSC-E1 33.31-36.20 NOM 0	33.31	36.20	20/45	3.0	70.00	28.00	TS-I10
DSC-E1 33.31-36.20 NOM 2	33.31	36.20	20/45	3.0	70.00	28.00	TS-I10
DSC-E1 36.21-39.60 NOM 0	36.21	39.60	20/45	3.0	82.00	30.00	TS-I11
DSC-E1 36.21-39.60 NOM 2	36.21	39.60	20/45	3.0	82.00	30.00	TS-I11
DSC-E1 39.61-43.00 NOM 0	39.61	43.00	20/45	3.0	82.00	33.00	TS-I12
DSC-E1 39.61-43.00 NOM 2	39.61	43.00	20/45	3.0	82.00	33.00	TS-I12
DSC-E1 43.01-47.00 NOM 0	43.01	47.00	20/45	3.0	82.00	36.00	TS-I13
DSC-E1 43.01-47.00 NOM 2	43.01	47.00	20/45	3.0	82.00	36.00	TS-I13
DSC-E1 47.01-51.70 NOM 0	47.01	51.70	20/45	3.0	82.00	39.00	TS-I14
DSC-E1 47.01-51.70 NOM 2	47.01	51.70	20/45	3.0	82.00	39.00	TS-I14
DSC-E1 51.71-56.20 NOM 0	51.71	56.20	20/45	3.0	93.00	43.00	TS-I15
DSC-E1 51.71-56.20 NOM 2	51.71	56.20	20/45	3.0	93.00	43.00	TS-I15
DSC-E1 56.21-60.60 NOM 0	56.21	60.60	20/45	3.0	93.00	47.00	TS-I16
DSC-E1 56.21-60.60 NOM 2	56.21	60.60	20/45	3.0	93.00	47.00	TS-I16
DSC-E1 60.61-65.00 NOM 0	60.61	65.00	20/45	3.0	93.00	51.00	TS-I17
DSC-E1 60.61-65.00 NOM 2	60.61	65.00	20/45	3.0	93.00	51.00	TS-I17

The drill tip is supplied in a grade that is suitable to machine the material group which is indicated in the drill head designation: P-Steel M-Stainless Steel K-Cast Iron.

For quotation form and user guide click on "More Info".

