





DSM-3D (10.0-19.9 mm 3xD) : CHAMDRILLJET, 3xD drills with indexable heads and internal coolant holes. Feature 4 standard d

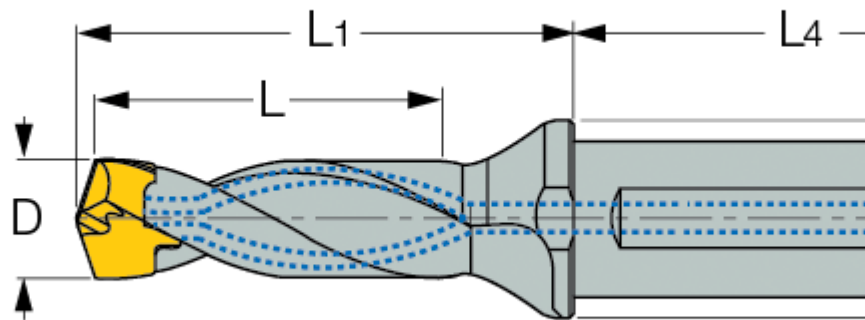

Designation	D min	D max	L	d	D3	L1	L4	Po. Size
DSM 100-030-16A-3D	10.00	10.90	30.0	16.00	20.00	46.0	48.0	10.0
DSM 110-033-16A-3D	11.00	11.90	33.0	16.00	20.00	50.6	48.0	11.0
DSM 120-036-16A-3D	12.00	12.90	36.0	16.00	20.00	54.9	48.0	12.0
DSM 130-039-16A-3D	13.00	13.90	39.0	16.00	20.00	59.1	48.0	13.0
DSM 140-042-16A-3D	14.00	14.90	42.0	16.00	20.00	63.4	48.0	14.0
DSM 150-045-20A-3D	15.00	15.90	45.0	20.00	25.00	67.5	50.0	15.0
DSM 160-048-20A-3D	16.00	16.90	48.0	20.00	25.00	71.9	50.0	16.0
DSM 170-051-20A-3D	17.00	17.90	51.0	20.00	25.00	76.2	50.0	17.0
DSM 180-054-25A-3D	18.00	18.90	54.0	25.00	32.00	80.5	56.0	18.0
DSM 190-057-25A-3D	19.00	19.90	57.0	25.00	32.00	84.8	56.0	19.0

Hole tolerance: $D+0.05$ in average conditions. However, it can be higher or lower according to machine and tooling conditions.