





DR-MF-2.25D : Multifunction drilling, boring, facing and external turning tool.

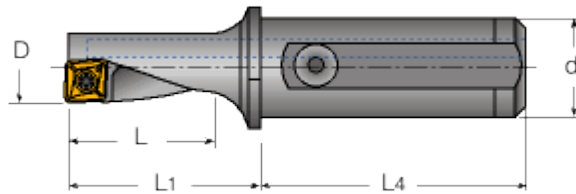

Right-hand shown



Designation	D	d	L	L1	L4	R/L
DR-MF-08R-2.25D-12A-04	8.00	12.00	18.0	22.0	38.0	R
DR-MF-10L-2.25D-12A-05	10.00	12.00	22.5	27.5	42.0	L
DR-MF-10R-2.25D-12A-05	10.00	12.00	22.5	27.5	42.0	R
DR-MF-12L-2.25D-16A-06	12.00	16.00	27.0	33.0	45.0	L
DR-MF-12R-2.25D-16A-06	12.00	16.00	27.0	33.0	45.0	R
DR-MF-14L-2.25D-16A-07	14.00	16.00	31.5	38.5	45.0	L
DR-MF-14R-2.25D-16A-07	14.00	16.00	31.5	38.5	45.0	R
DR-MF-16L-2.25D-20A-08	16.00	20.00	36.0	44.0	50.0	L
DR-MF-16R-2.25D-20A-08	16.00	20.00	36.0	44.0	50.0	R
DR-MF-20L-2.25D-25A-10	20.00	25.00	45.0	55.0	56.0	L
DR-MF-20R-2.25D-25A-10	20.00	25.00	45.0	55.0	56.0	R
DR-MF-25L-2.25D-32A-13	25.00	32.00	56.5	69.0	61.0	L
DR-MF-25R-2.25D-32A-13	25.00	32.00	56.5	69.0	61.0	R
DR-MF-32L-2.25D-40A-17	32.00	40.00	72.0	86.0	74.0	L
DR-MF-32R-2.25D-40A-17	32.00	40.00	72.0	86.0	74.0	R

In non-rotating applications hole diameter can be adjusted within the specified range by shifting drill's center line along machine's X-axis.

The tools have an internal coolant hole.