





MM HR : Interchangeable 2 flute solid carbide, concave radius milling head. Part of the MULTI-MASTER system.

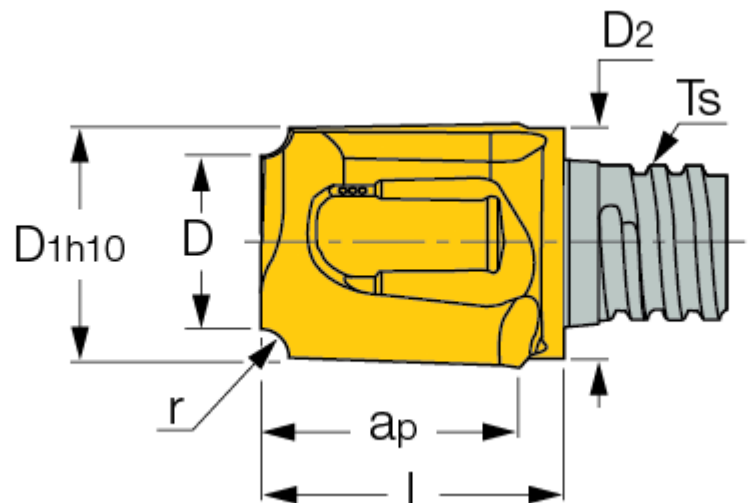

Economical solution



Designation	D1	D	Z	ap	r	Ts	D2	l	Tm	Grade
MM HR1.0/047-5.8-2T05	8.0	5.80	2	7.50	1.00	T05	7.60	10.60	r0.5-3.0	IC908
MM HR2.5/094-5.1-2T06	10.0	5.10	2	9.50	2.50	T06	9.60	12.50	r0.5-3.0	IC908
MM HR2.0/078-6.0-2T06	10.0	6.00	2	9.50	2.00	T06	9.60	12.50	r0.5-3.0	IC908
MM HR1.6/063-6.8-2T06	10.0	6.80	2	9.50	1.60	T06	9.60	12.50	r0.5-3.0	IC908
MM HR4.0/156-4.7-2T08	12.7	4.70	2	12.00	4.00	T08	11.50	15.60	r0.5-4.0	IC908
MM HR3.0/125-6.5-2T08	12.7	6.50	2	12.00	3.00	T08	11.50	15.60	r0.5-4.0	IC908
MM HR5.0/188-6.2-2T10	16.0	6.20	2	15.00	5.00	T10	15.20	19.10	r0.5-5.0	IC908
MM HR6.0/236-8.0-2T12	20.0	8.00	2	7.00	6.00	T12	18.30	17.40	r0.5-6.0	IC908

For Clamping keys (should be ordered separately), tightening torques and clamping instructions, click on "More Info".

Do not apply lubricant to the threaded connection.