






SOF45CL : 45° face mills, using square or octagonal double-sided inserts with 8/16 cutting edges (HELIDO 845 line).

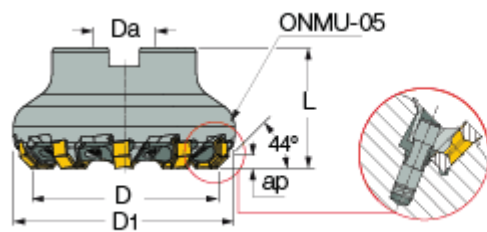

Designation	D	D1	Z	L	ap	Da	D3	L3	ap3	Arbor	Kg
SOF45CL 8/16 D050-07-22R	50.00	60.4	7	40.00	3.50	22.00	47.65	41.20	6.00	A	0.64
SOF45CL 8/16 D063-10-22R	63.00	73.4	10	40.00	3.50	22.00	60.65	41.20	6.00	B	0.70
SOF45CL 8/16 D080-12-27R	80.00	90.4	12	50.00	3.50	27.00	77.65	51.20	6.00	B	1.34
SOF45CL 8/16 D100-16-32R	100.00	110.4	16	50.00	3.50	32.00	97.65	51.20	6.00	B	1.78
SOF45CL 8/16 D125-20-40R	125.00	135.6	20	63.00	3.50	40.00	122.65	64.20	6.00	B	3.37