





ECR-B-M/ECR-B-M...R : 4-7 flute, 45°helix medium length (2xd) solid carbide roughing endmills. Used for high stock removal rates

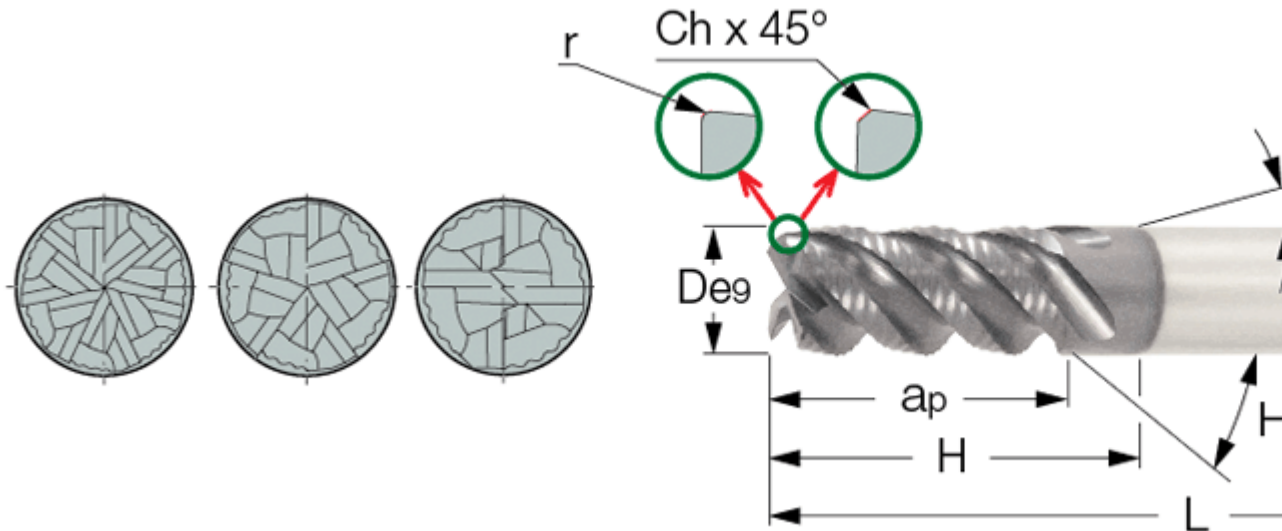

Designation	D	d	ap	H	L	Flute	Ha°/b>	Rd°/b>	Shank	r	Ch	fz(min)	fz(max)	Grade
ECR-B4M 05-10C06-57	5.00	6.00	10.00	15.00	57.00	4	45.0	5.0	C	-	0.20	0.02	0.05	IC900
ECR-B4M 05-10W06-57	5.00	6.00	10.00	15.00	57.00	4	45.0	5.0	W	-	0.20	0.02	0.05	IC900
ECR-B4M 06-12C06-57	6.00	6.00	12.00	-	57.00	4	45.0	5.0	C	-	0.25	0.03	0.06	IC900
ECR-B4M 06-12W06-57	6.00	6.00	12.00	-	57.00	4	45.0	5.0	W	-	0.25	0.03	0.06	IC900
ECR-B4M 08-16C08-63	8.00	8.00	16.00	-	63.00	4	45.0	5.0	C	-	0.25	0.03	0.08	IC900
ECR-B4M 08-16W08-63	8.00	8.00	16.00	-	63.00	4	45.0	5.0	W	-	0.25	0.03	0.08	IC900
ECR-B4M 10-20C10-72	10.00	10.00	20.00	-	72.00	4	45.0	5.0	C	-	0.30	0.03	0.09	IC900
ECR-B4M 10-20C10-72R1.0	10.00	10.00	20.00	-	72.00	4	45.0	5.0	C	1.00	-	0.03	0.09	IC900
ECR-B4M 10-20W10-72	10.00	10.00	20.00	-	72.00	4	45.0	5.0	W	-	0.30	0.03	0.09	IC900
ECR-B4M 10-20W10-72R1.0	10.00	10.00	20.00	-	72.00	4	45.0	5.0	W	1.00	-	0.03	0.09	IC900
ECR-B4M 12-24C12-83	12.00	12.00	24.00	-	83.00	4	45.0	5.0	C	-	0.35	0.04	0.10	IC900
ECR-B4M 12-24C12-83R1.2	12.00	12.00	24.00	-	83.00	4	45.0	5.0	C	1.20	-	0.04	0.10	IC900
ECR-B4M 12-24W12-83	12.00	12.00	24.00	-	83.00	4	45.0	5.0	W	-	0.35	0.04	0.10	IC900
ECR-B4M 12-24W12-83R1.2	12.00	12.00	24.00	-	83.00	4	45.0	5.0	W	1.20	-	0.04	0.10	IC900
ECR-B5M 16-32C16-92	16.00	16.00	32.00	-	92.00	5	45.0	5.0	C	-	0.40	0.05	0.11	IC900
ECR-B5M 16-32C16-92R1.6	16.00	16.00	32.00	-	92.00	5	45.0	5.0	C	1.60	-	0.05	0.11	IC900
ECR-B5M 16-32W16-92	16.00	16.00	32.00	-	92.00	5	45.0	5.0	W	-	0.40	0.05	0.11	IC900
ECR-B5M 16-32W16-92R1.6	16.00	16.00	32.00	-	92.00	5	45.0	5.0	W	1.60	-	0.05	0.11	IC900

ECR-B7M 20-40C20-104	20.00	20.00	40.00	-	104.00	7	45.0	5.0	C	-	0.40	0.05	0.11	IC900
ECR-B7M 20-40W20-104	20.00	20.00	40.00	-	104.00	7	45.0	5.0	W	-	0.40	0.05	0.11	IC900

First choice in roughing applications.