





**FF EWX-MM-04** : HELIDO UPFEED endmills with MULTI-MASTER threaded adaptation, for fast feed, carrying double-sided Inserts w

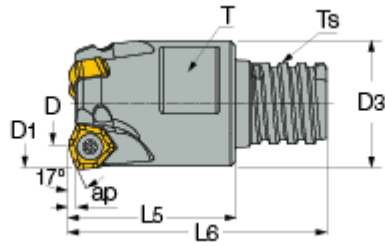

Designation	D1	D	Z	D2	Ts	L5	L6	T	ap	Rd?/b>	Kg
FF EWX D16-2-MMT10-04	16.0	8.60	2	15.20	T10	19.50	31.25	12.0	0.80	5.0	0.06
FF EWX D20-3-MMT12-04	20.0	12.60	3	18.80	T12	25.00	38.80	15.0	0.80	4.8	0.21

Insert radius for programming  $r=1.9$  mm  
For tightening torque click on "More Info".