





ERC-E-3 : 3 flute, 38°helix, medium length, solid carbide roughing endmills. Used for maximum stock removal on aluminum and other

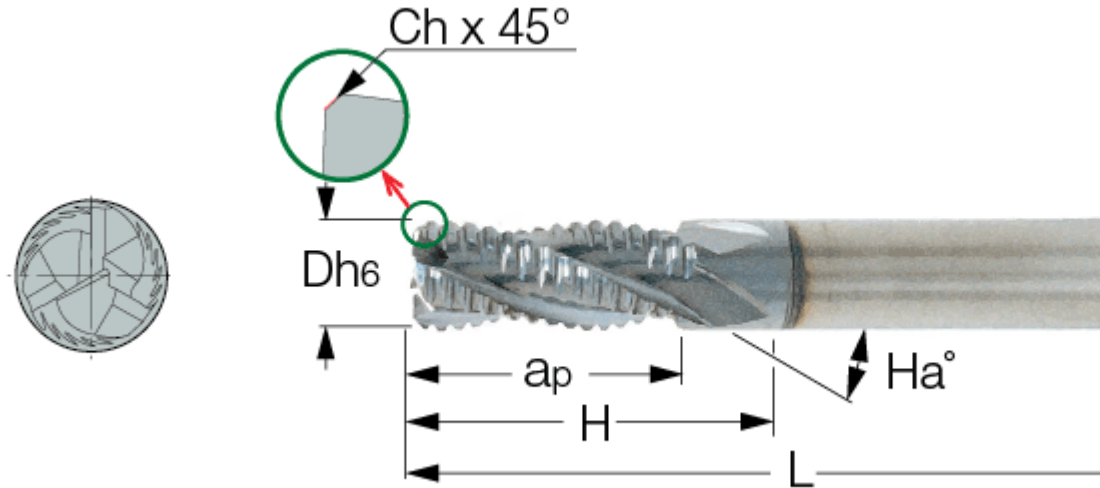

Aluminum



Designation	D	d	ap	H	L	Flute	Ha°/b>	Rd°/b>	Shank	Ch	fz(min)	fz(max)	Grade
ERC060E13-3C06	6.00	6.00	13.00	21.00	57.00	3	38.0	5.0	C	0.50	0.03	0.07	IC08
ERC060E13-3W06	6.00	6.00	13.00	21.00	57.00	3	38.0	5.0	W	0.50	0.03	0.07	IC08IC300
ERC080E20-3C08	8.00	8.00	20.00	28.00	63.00	3	38.0	5.0	C	0.50	0.03	0.15	IC08
ERC080E20-3W08	8.00	8.00	20.00	28.00	63.00	3	38.0	5.0	W	0.50	0.03	0.15	IC08IC300
ERC100E22-3C10	10.00	10.00	22.00	30.00	72.00	3	38.0	5.0	C	0.60	0.05	0.20	IC08
ERC100E22-3W10	10.00	10.00	22.00	30.00	72.00	3	38.0	5.0	W	0.60	0.05	0.20	IC08IC300
ERC120E25-3C12	12.00	12.00	25.00	37.00	83.00	3	38.0	5.0	C	0.60	0.07	0.22	IC08
ERC120E25-3W12	12.00	12.00	25.00	37.00	83.00	3	38.0	5.0	W	0.60	0.07	0.22	IC08IC300
ERC140E25-3C14	14.00	14.00	25.00	37.00	83.00	3	38.0	5.0	C	0.60	0.07	0.22	IC08
ERC140E25-3W14	14.00	14.00	25.00	37.00	83.00	3	38.0	5.0	W	0.60	0.07	0.22	IC300
ERC160E32-3C16	16.00	14.00	32.00	44.00	92.00	3	38.0	5.0	C	0.60	0.07	0.25	IC08
ERC160E32-3W16	16.00	14.00	32.00	44.00	92.00	3	38.0	5.0	W	0.60	0.07	0.25	IC08IC300
ERC180E32-3W18	18.00	18.00	32.00	44.00	92.00	3	38.0	5.0	W	0.60	0.07	0.25	IC300
ERC200E38-3C20	20.00	20.00	38.00	55.00	104.00	3	38.0	5.0	C	0.70	0.07	0.25	IC08
ERC200E38-3W20	20.00	20.00	38.00	55.00	104.00	3	38.0	5.0	W	0.70	0.07	0.25	IC08IC300
ERC250E45-3C25	25.00	25.00	45.00	64.00	121.00	3	38.0	5.0	C	0.70	0.07	0.25	IC08
ERC250E45-3W25	25.00	25.00	45.00	64.00	121.00	3	38.0	5.0	W	0.70	0.07	0.25	IC300

