





BCM : DROPMILL, Ball nose endmills carrying tangent straight edge inserts. Used for semi finishing and finishing at high feed rates. depths of cut.

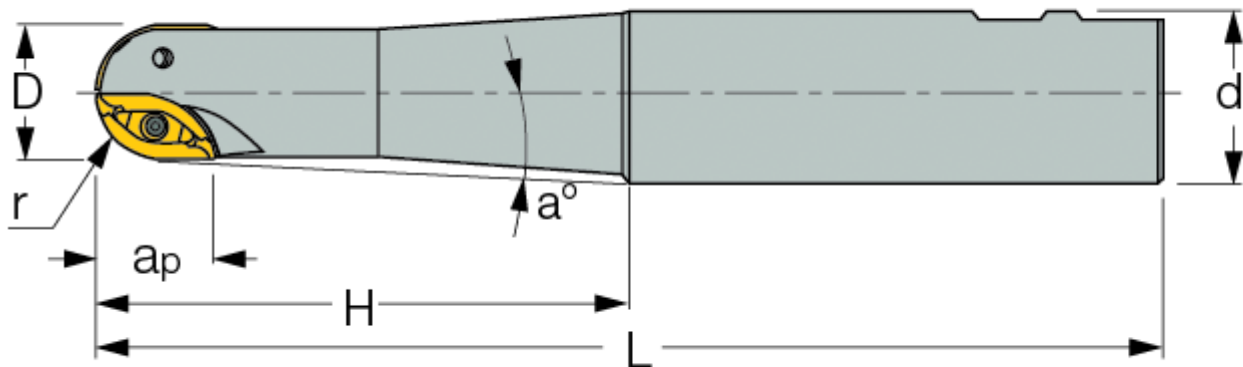

Designation	D	r	ap	Z	L	H	d	a°	Shank	Type	Coolant	Kg
BCM D12-A-C12	12.00	6.00	11.40	2	120.00	30.00	12.00	-	C	A	N	0.13
BCM D12-B-C16	12.00	6.00	11.40	2	160.00	60.00	16.00	2.0	C	B	N	0.25
BCM D16-A-C16-C	16.00	8.00	13.00	2	130.00	36.00	16.00	-	C	A	Y	0.95
BCM D16-B-C20-C	16.00	8.00	13.00	2	160.00	60.00	20.00	2.2	C	B	Y	0.95
BCM D20-A-C20-C	20.00	10.00	17.00	2	160.00	65.00	20.00	-	C	A	Y	0.32
BCM D20-B-C25-C	20.00	10.00	17.00	2	200.00	90.00	25.00	1.5	C	B	Y	0.69
BCM D25-A-W25-C	25.00	12.50	20.00	2	170.00	70.00	25.00	-	W	A	Y	0.56
BCM D25-B-C32-C	25.00	12.50	20.00	2	220.00	95.00	32.00	2.4	C	B	Y	1.20
BCM D30-A-W32-C	30.00	15.00	26.00	2	160.00	67.00	32.00	-	W	A	Y	0.80
BCM D30-B-W40	30.00	15.00	26.00	2	250.00	125.00	40.00	2.6	W	B	N	1.82
BCM D30-B-W42	30.00	15.00	26.00	2	250.00	125.00	42.00	3.1	W	B	N	1.97
BCM D32-A-W32-C	32.00	16.00	27.00	2	160.00	65.00	32.00	-	W	A	Y	0.84
BCM D32-B-W40-C	32.00	16.00	27.00	2	250.00	125.00	40.00	2.1	W	B	Y	1.90
BCM D40-A-W32-C	40.00	20.00	36.00	2	160.00	88.00	32.00	-	W	A	Y	1.00
BCM D40-B-W40-C	40.00	20.00	36.00	2	250.00	125.00	40.00	-	W	B	Y	2.10
BCM D50-A-W50-C	50.00	25.00	43.00	2	200.00	130.00	50.00	-	W	A	Y	2.58

For adaptation, click on "More Info".