





HM90 EAL-ER : Endmills with integral ER collet adaptation, used for machining aluminum.

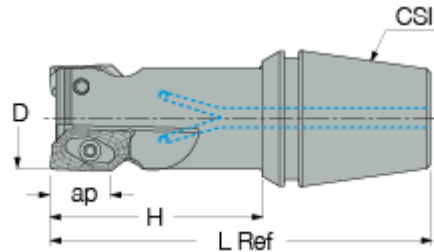

Designation	D	Z	H	L	ap	CSI	RPM max	Rd°	Kg
HM90 EAL-D25-L50-ER32-15	25.00	2	50.00	90.00	15.00	ER32	37500	25.0	0.48
HM90 EAL-D32-L65-ER40-16	32.00	2	65.00	111.00	15.80	ER40	45640	22.4	0.60

Note: HM90 APCR 1605..R-P inserts with corner radii larger than 4.5 mm should be used only on BR tools.