





FF EW-CF : FEEDMILL endmill with a CLICKFIT adaptation using FF WOMT inserts used for very high metal removal rates - up to 3.5

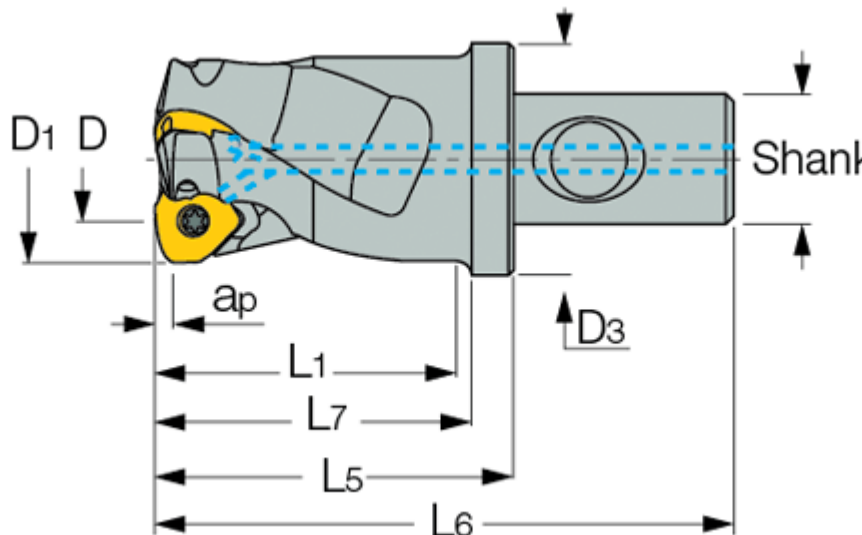

Designation	D1	ap	D	Z	L1	L7	L5	L6	D3	Rd°	Shank	Nxcm	Kg
FF EW D25-050-CF4-06-C	25.0	1.50	11.00	2	50.0	54.00	62.00	104.00	44.00	5.0	CF4	200	0.52
FF EW D25-080-CF4-06-C	25.0	1.50	11.00	2	80.0	84.00	92.00	134.00	44.00	5.0	CF4	200	0.48
FF EW D32-060-CF4-06-C	32.0	1.50	18.00	3	60.0	64.00	72.00	114.00	44.00	4.0	CF4	200	0.55
FF EW D32-100-CF4-06-C	32.0	1.50	18.00	3	100.0	104.00	112.00	154.00	44.00	4.0	CF4	200	0.78
FF EW D32-120-CF4-06-C	32.0	1.50	18.00	3	120.0	124.00	132.00	174.00	44.00	2.5	CF4	200	0.94
FF EW D40-080-CF4-06-C	40.0	1.50	26.00	4	80.0	84.00	92.00	134.00	44.00	2.5	CF4	200	0.90
FF EW D40-120-CF4-06-C	40.0	1.50	26.00	4	120.0	124.00	132.00	174.00	44.00	2.5	CF4	200	1.24
FF EW D40-200-CF4-06-C	40.0	1.50	26.00	4	200.0	204.00	182.00	254.00	44.00	2.5	CF4	200	1.92
FF EW D40-060-CF4-09-C	40.0	2.00	19.20	3	57.0	57.00	68.00	110.00	44.00	5.0	CF4	500	0.50
FF EW D40-060-CF4-09-CP	40.0	2.00	19.20	2	57.0	60.00	68.00	110.00	44.00	5.0	CF4	500	0.72
FF EW D40-200-CF4-09-C	40.0	2.00	19.20	3	197.0	200.00	208.00	250.00	44.00	5.0	CF4	500	1.94