





**ECC-E-3** : 3 flute, 38° helix medium length slot / drill solid carbide endmills with chamfered corners.

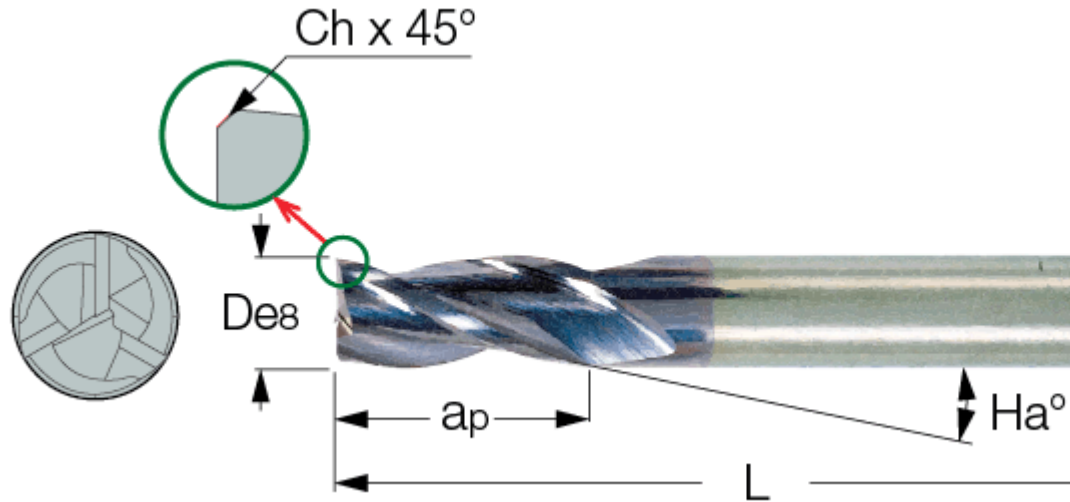

Designation	D	d	ap	L	Flute	Ha°/b>	Rd°/b>	Shank	Ch	fz(min)	fz(max)	Grade
ECC020B07-3C03	2.00	3.00	7.00	38.00	3	45.0	5.0	C	0.10	0.01	0.03	IC300
ECC025E07-3C03	2.50	3.00	7.00	38.00	3	38.0	5.0	C	0.10	0.01	0.03	IC300
ECC030E10-3C03	3.00	3.00	10.00	38.00	3	38.0	5.0	C	0.10	0.01	0.04	IC300IC900
ECC035E12-3C04	3.50	4.00	12.00	50.00	3	38.0	5.0	C	0.10	0.01	0.04	IC300IC900
ECC040E12-3C04	4.00	4.00	12.00	50.00	3	38.0	5.0	C	0.15	0.02	0.05	IC300IC900
ECC050E14-3C05	5.00	5.00	14.00	50.00	3	38.0	5.0	C	0.15	0.02	0.06	IC300IC900
ECC060E16-3C06	6.00	6.00	16.00	57.00	3	38.0	5.0	C	0.15	0.03	0.07	IC300IC900
ECC060E16-3W06	6.00	6.00	16.00	57.00	3	38.0	5.0	W	0.15	0.03	0.07	IC900
ECC080E20-3C08	8.00	8.00	20.00	63.00	3	38.0	5.0	C	0.15	0.03	0.09	IC300IC900
ECC080E20-3W08	8.00	8.00	20.00	63.00	3	38.0	5.0	W	0.15	0.03	0.09	IC300IC900
ECC100E22-3C10	10.00	10.00	22.00	72.00	3	38.0	5.0	C	0.25	0.03	0.10	IC300IC900
ECC100E22-3W10	10.00	10.00	22.00	72.00	3	38.0	5.0	W	0.25	0.03	0.10	IC900
ECC120E25-3C12	12.00	12.00	25.00	83.00	3	38.0	5.0	C	0.25	0.04	0.11	IC300IC900
ECC120E25-3W12	12.00	12.00	25.00	83.00	3	38.0	5.0	W	0.25	0.04	0.11	IC300IC900
ECC160A32-3W16	16.00	16.00	32.00	92.00	3	38.0	5.0	W	0.25	0.05	0.13	IC300
ECC160E32-3C16	16.00	16.00	32.00	92.00	3	38.0	5.0	C	0.25	0.05	0.13	IC300IC900
ECC160E32-3W16	16.00	16.00	32.00	92.00	3	38.0	5.0	W	0.25	0.05	0.13	IC900
ECC200E38-3C20	20.00	20.00	38.00	104.00	3	38.0	5.0	C	0.25	0.05	0.13	IC300IC900

ECC200E38-3W20	20.00	20.00	38.00	104.00	3	38.0	5.0	W	0.25	0.05	0.13	IC900
----------------	-------	-------	-------	--------	---	------	-----	---	------	------	------	-------

Multi-purpose endmill  
Suitable for deep slotting