





**ECA-B-3** : 3 flute, 45°helix medium length solid carbide endmills. Used for machining aluminum.



Designation	D	d	ap	L	Flute	Ha°/b>	Rd°/b>	Shank	r	fz(min)	fz(max)	Grade
ECA-B-3 04-12C06-57	4.00	6.00	12.00	57.00	3	45.0	5.0	C	0.10	0.02	0.05	IC08
ECA-B-3 04-12W06-57	4.00	6.00	12.00	57.00	3	45.0	5.0	W	0.10	0.02	0.05	IC08
ECA-B-3 05-14C06-57	5.00	6.00	14.00	57.00	3	45.0	5.0	C	0.20	0.02	0.06	IC08
ECA-B-3 05-14W06-57	5.00	6.00	14.00	57.00	3	45.0	5.0	W	0.20	0.02	0.06	IC08
ECA-B-3 06-16C06-57	6.00	6.00	16.00	57.00	3	45.0	5.0	C	0.20	0.03	0.07	IC08
ECA-B-3 06-16W06-57	6.00	6.00	16.00	57.00	3	45.0	5.0	W	0.20	0.03	0.07	IC08
ECA-B-3 08-20C08-63	8.00	8.00	21.50	63.00	3	45.0	5.0	C	0.20	0.03	0.09	IC08
ECA-B-3 08-20W08-63	8.00	8.00	21.50	63.00	3	45.0	5.0	W	0.20	0.03	0.09	IC08
ECA-B-3 10-22C10-72	10.00	10.00	23.50	72.00	3	45.0	5.0	C	0.20	0.03	0.10	IC08
ECA-B-3 10-22W10-72	10.00	10.00	23.50	72.00	3	45.0	5.0	W	0.20	0.03	0.10	IC08
ECA-B-3 12-25C12-83	12.00	12.00	25.00	83.00	3	45.0	5.0	C	0.20	0.04	0.11	IC08
ECA-B-3 12-25W12-83	12.00	12.00	25.00	83.00	3	45.0	5.0	W	0.20	0.04	0.11	IC08
ECA-B-3 14-30C14-83	14.00	14.00	30.00	83.00	3	45.0	5.0	C	0.20	0.04	0.12	IC08
ECA-B-3 14-30W14-83	14.00	14.00	30.00	83.00	3	45.0	5.0	W	0.20	0.04	0.12	IC08
ECA-B-3 16-32C16-92	16.00	16.00	32.00	92.00	3	45.0	5.0	C	0.20	0.05	0.13	IC08
ECA-B-3 16-32W16-92	16.00	16.00	32.00	92.00	3	45.0	5.0	W	0.20	0.05	0.13	IC08
ECA-B-3 20-38C20-104	20.00	20.00	38.00	104.00	3	45.0	5.0	C	0.20	0.05	0.13	IC08
ECA-B-3 20-38W20-104	20.00	20.00	38.00	104.00	3	45.0	5.0	W	0.20	0.05	0.13	IC08

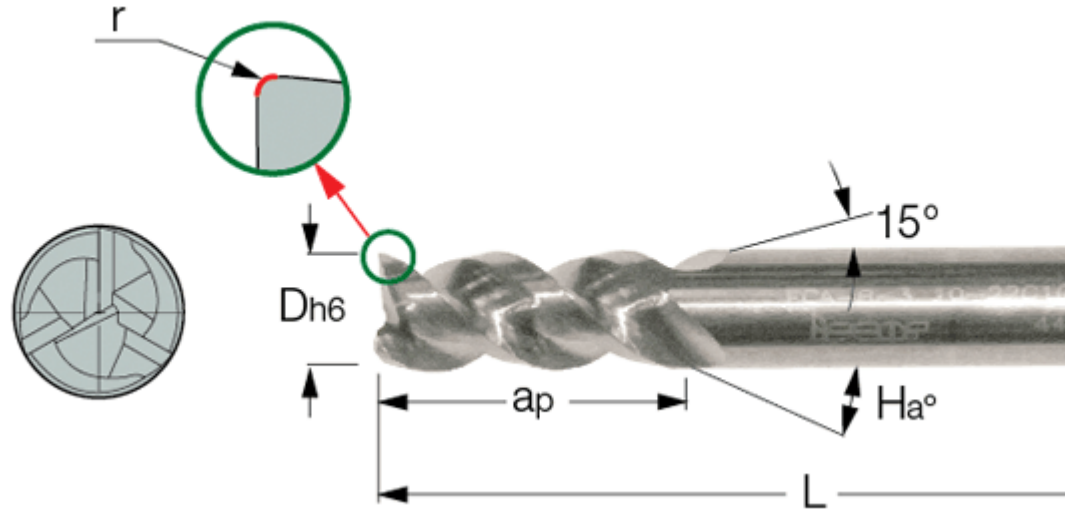