





EC-B3 (Economical-Short) : SOLIDECO - economical type 3 flute, 45°helix center cutting short solid carbide endmills.

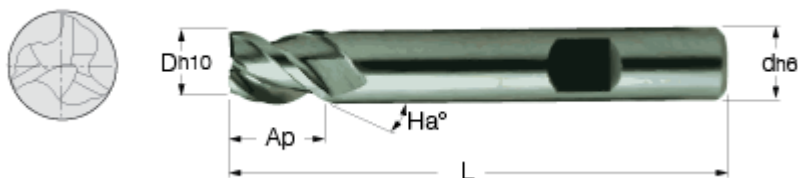

Designation	D	d	ap	L	Flute	Ha°/b>	Rd°/b>	Shank	fz(min)	fz(max)	Grade
EC-B3 015-03C03E38	1.50	3.00	3.00	38.00	3	45.0	5.0	C	0.00	0.02	IC08IC900
EC-B3 02-03W06E50	2.00	6.00	3.00	50.00	3	45.0	5.0	W	0.01	0.03	IC08IC900
EC-B3 03-04W06E50	3.00	6.00	4.00	50.00	3	45.0	5.0	W	0.01	0.04	IC08IC900
EC-B3 035-04W06E50	3.50	6.00	4.00	50.00	3	45.0	5.0	W	0.01	0.04	IC08IC900
EC-B3 04-05W06E54	4.00	6.00	5.00	54.00	3	45.0	5.0	W	0.02	0.05	IC08IC900
EC-B3 045-05W06E54	4.50	6.00	5.00	54.00	3	45.0	5.0	W	0.02	0.05	IC08IC900
EC-B3 05-06C06E57	5.00	6.00	6.00	54.00	3	45.0	5.0	C	0.02	0.06	IC08IC900
EC-B3 06-07W06E54	6.00	6.00	7.00	54.00	3	45.0	5.0	W	0.03	0.07	IC08IC900
EC-B3 07-08W08E58	7.00	8.00	8.00	58.00	3	45.0	5.0	W	0.03	0.08	IC08IC900
EC-B3 08-09W08E58	8.00	8.00	9.00	58.00	3	45.0	5.0	W	0.03	0.09	IC08IC900
EC-B3 09-10W10E66	9.00	10.00	10.00	66.00	3	45.0	5.0	W	0.03	0.09	IC08IC900
EC-B3 10-11W10E66	10.00	10.00	11.00	66.00	3	45.0	5.0	W	0.03	0.10	IC08IC900
EC-B3 12-12W12E73	12.00	12.00	12.00	73.00	3	45.0	5.0	W	0.04	0.11	IC08IC900
EC-B3 14-14W14E75	14.00	14.00	14.00	75.00	3	45.0	5.0	W	0.04	0.12	IC08IC900
EC-B3 16-16W16E82	16.00	16.00	16.00	82.00	3	45.0	5.0	W	0.05	0.13	IC08IC900
EC-B3 18-18W18E84	18.00	18.00	18.00	84.00	3	45.0	5.0	W	0.05	0.13	IC08IC900
EC-B3 20-20W20E92	20.00	20.00	20.00	92.00	3	45.0	5.0	W	0.05	0.13	IC08IC900