





MM EFS-CF : 4 flute, 38° helix with variable pitch, interchangeable solid carbide heads. Used for chatter free roughing and finishing

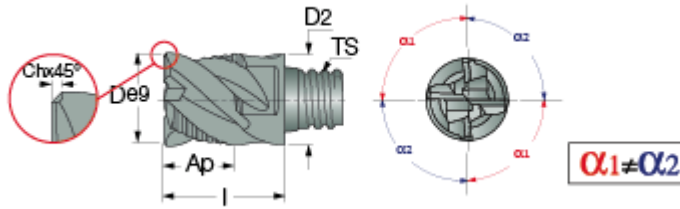

Designation	D	Flute	ap	Ch	Ts	D2	l	Ha°	fz(min)	fz(max)	Grade
MM EFS060E05-4T05 CF	6.00	4	5.00	0.25	T05	7.70	10.00	38.0	0.03	0.08	IC908
MM EFS080E05-4T05 CF	8.00	4	5.00	0.3	T05	7.70	10.00	38.0	0.03	0.08	IC908
MM EFS100E07-4T06 CF	10.00	4	7.00	0.4	T06	9.60	13.00	38.0	0.03	0.09	IC908
MM EFS120E09-4T08 CF	12.00	4	9.00	0.5	T08	11.70	16.50	38.0	0.04	0.10	IC908
MM EFS.500E37-4T08 CF	12.70	4	9.60	.500	T08	12.40	16.50	38.0	0.04	0.10	IC908
MM EFS160E12-4T10 CF	16.00	4	12.00	0.6	T10	15.30	20.50	38.0	0.05	0.11	IC908
MM EFS200E15-4T12 CF	20.00	4	16.00	0.6	T12	18.44	25.50	38.0	0.05	0.11	IC908
MM EFS250E22-4T15 CF	25.00	4	22.00	0.6	T15	23.90	37.00	38.0	0.06	0.11	IC908

For Clamping keys (should be ordered separately), tightening torques and clamping instructions, click on "More Info".

Do not apply lubricant to the threaded connection.