





ECL-B-4/6 : 4 & 6 flute, 45° helix long solid carbide endmills.

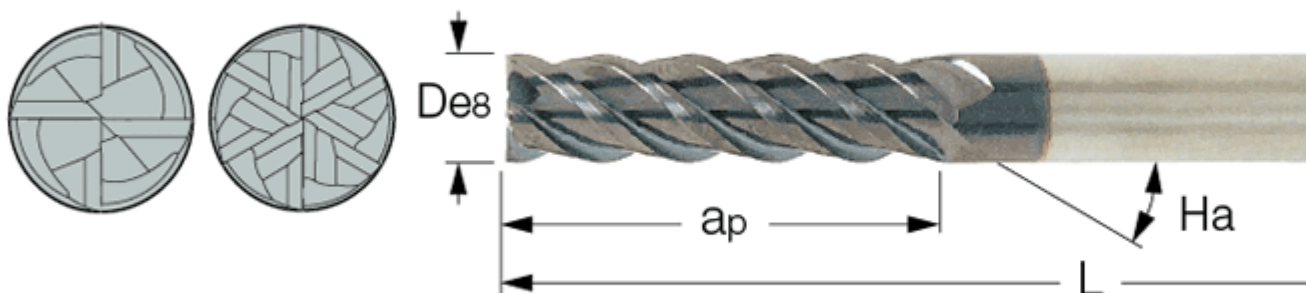

Designation	D	d	ap	L	Flute	Ha°/b>	Shank	fz(min)	fz(max)	Grade
ECL060B24-4C06	6.00	6.00	24.00	65.00	4	45.0	C	0.03	0.07	IC900
ECL060B24-4W06	6.00	6.00	24.00	65.00	4	45.0	W	0.03	0.07	IC900
ECL080B32-4C08	8.00	8.00	32.00	80.00	4	45.0	C	0.03	0.09	IC900
ECL080B32-4W08	8.00	8.00	32.00	80.00	4	45.0	W	0.03	0.09	IC900
ECL100B40-4C10	10.00	10.00	40.00	100.00	4	45.0	C	0.03	0.10	IC900
ECL100B40-4W10	10.00	10.00	40.00	100.00	4	45.0	W	0.03	0.10	IC900
ECL120B48-4C12	12.00	12.00	48.00	100.00	4	45.0	C	0.04	0.11	IC900
ECL120B48-4W12	12.00	12.00	48.00	100.00	4	45.0	W	0.04	0.11	IC900
ECL140B50-4C14	14.00	14.00	50.00	100.00	4	45.0	C	0.04	0.12	IC900
ECL140B50-4W14	14.00	14.00	50.00	100.00	4	45.0	W	0.04	0.12	IC900
ECL160B56-6C16	16.00	16.00	56.00	115.00	6	45.0	C	0.05	0.13	IC900
ECL160B56-6W16	16.00	16.00	56.00	115.00	6	45.0	W	0.05	0.13	IC900
ECL200B60-6C20	20.00	20.00	60.00	125.00	6	45.0	C	0.05	0.13	IC900
ECL200B60-6W20	20.00	20.00	60.00	125.00	6	45.0	W	0.05	0.13	IC900

Smooth cutting in extra long depth