



EC-B-4 : 4 flute, 45° helix medium length solid carbide endmills.

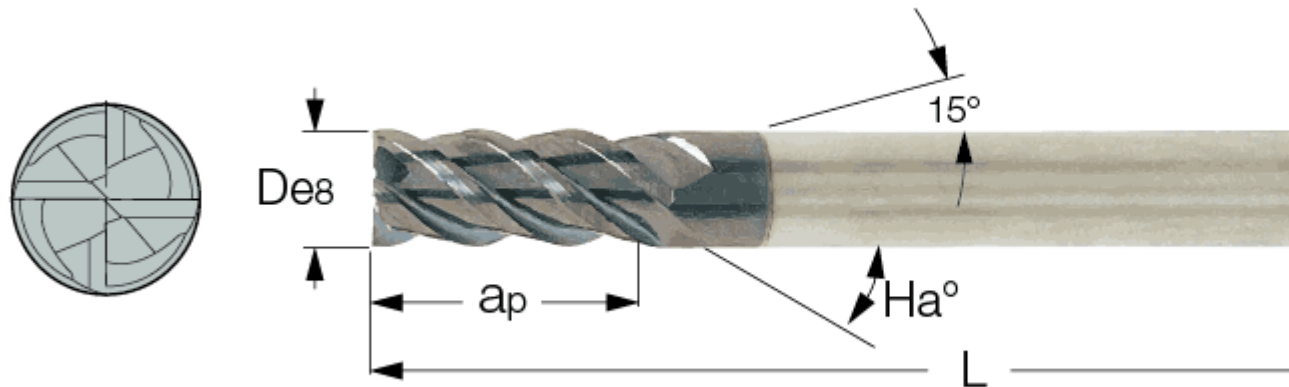

Designation	D	d	ap	L	Flute	Ha°/b>	Rd°/b>	Shank	fz(min)	fz(max)	Grade
EC020B07-4C03	2.00	3.00	7.00	38.00	4	45.0	5.0	C	0.01	0.03	IC08IC300IC900
EC020B07-4C06	2.00	6.00	7.00	57.00	4	45.0	5.0	C	0.01	0.03	IC900
EC030B10-4C03	3.00	3.00	10.00	38.00	4	45.0	5.0	C	0.01	0.04	IC900
EC030B10-4C06	3.00	6.00	10.00	57.00	4	45.0	5.0	C	0.01	0.04	IC900
EC040B12-4C04	4.00	4.00	12.00	50.00	4	45.0	5.0	C	0.02	0.05	IC900
EC040B12-4C06	4.00	6.00	12.00	57.00	4	45.0	5.0	C	0.02	0.05	IC900
EC050B14-4C05	5.00	5.00	14.00	50.00	4	45.0	5.0	C	0.02	0.06	IC900
EC050B14-4C06	5.00	6.00	14.00	57.00	4	45.0	5.0	C	0.02	0.06	IC900
EC060B16-4C06	6.00	6.00	16.00	57.00	4	45.0	5.0	C	0.03	0.07	IC900
EC060B16-4W06	6.00	6.00	16.00	57.00	4	45.0	5.0	W	0.03	0.07	IC900
EC070B16-4C07	7.00	7.00	16.00	60.00	4	45.0	5.0	C	0.03	0.08	IC900
EC080B20-4C08	8.00	8.00	20.00	63.00	4	45.0	5.0	C	0.03	0.09	IC900
EC080B20-4W08	8.00	8.00	20.00	63.00	4	45.0	5.0	W	0.03	0.09	IC900
EC090B20-4C09	9.00	9.00	20.00	67.00	4	45.0	5.0	C	0.03	0.09	IC900
EC100B22-4C10	10.00	10.00	22.00	72.00	4	45.0	5.0	C	0.03	0.10	IC900
EC100B22-4W10	10.00	10.00	22.00	72.00	4	45.0	5.0	W	0.03	0.10	IC900
EC120B25-4C12	12.00	12.00	25.00	83.00	4	45.0	5.0	C	0.04	0.11	IC900
EC120B25-4W12	12.00	12.00	25.00	83.00	4	45.0	5.0	W	0.04	0.11	IC900

EC140B25-4C14	14.00	14.00	25.00	83.00	4	45.0	5.0	C	0.04	0.12	IC900
EC140B25-4W14	14.00	14.00	25.00	83.00	4	45.0	5.0	W	0.04	0.12	IC900
EC160B32-4C16	16.00	16.00	32.00	92.00	4	45.0	5.0	C	0.05	0.13	IC900
EC160B32-4W16	16.00	16.00	32.00	92.00	4	45.0	5.0	W	0.05	0.13	IC900
EC180B32-4C18	18.00	18.00	32.00	92.00	4	45.0	5.0	C	0.05	0.13	IC900
EC180B32-4W18	18.00	18.00	32.00	92.00	4	45.0	5.0	W	0.05	0.13	IC900
EC200B38-4C20	20.00	20.00	38.00	104.00	4	45.0	5.0	C	0.05	0.13	IC900
EC200B38-4W20	20.00	20.00	38.00	104.00	4	45.0	5.0	W	0.05	0.13	IC900