





TRIB-SM : Grooving shell mills with triple-edged precision ground inserts.

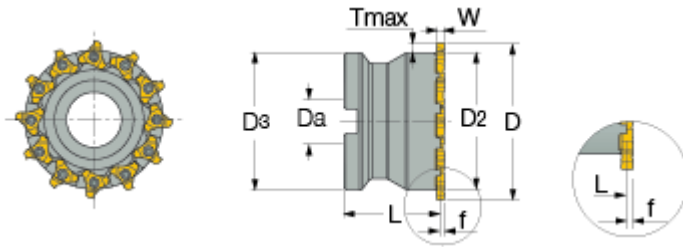

Designation	D	W min	W max	Da	D2	D3	Z	L	Kg
TRIB 50-22SM 6Z	50.00	1.20	4.00	22.00	39.70	39.70	6	39.00	0.35
TRIB 50-22SM 6Z-B	50.00	4.00	6.50	22.00	39.70	39.70	6	39.00	0.34
TRIB 63-22SM 8Z	63.00	1.20	4.00	22.00	52.70	40.00	8	39.00	0.50
TRIB 63-22SM 8Z-B	63.00	4.01	6.50	22.00	52.70	40.00	8	39.00	0.00
TRIB 80-27SM 11Z	80.00	1.20	4.00	27.00	69.70	69.70	11	49.00	1.06
TRIB 80-27SM 11Z-B	80.00	4.01	6.50	27.00	69.70	69.70	11	49.00	0.00

W, Tmax, f, Refer to insert data

For inserts with W=4.01-6.50 mm, order tools with -B suffix (deeper pockets). For example:

TRIB 63-22SM-8Z-B

For adaptation click on "More Info".