





**F45LN-N15** : TANGMILL, 45°face mills with LN..1506... tangentially clamped inserts.

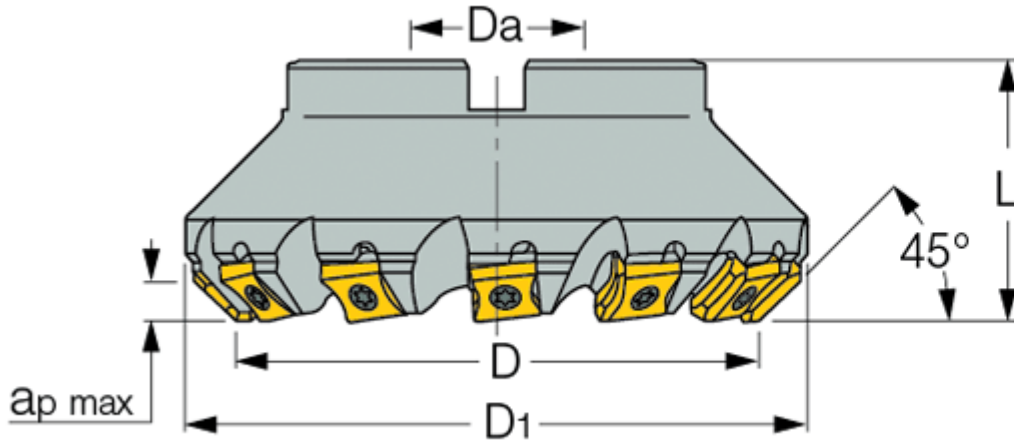

Designation	D	D1	Z	L	ap	Da	Arbor	R/L	Kg
F45LN D063-08-22-R-N15	63.00	83.0	8	40.00	7.50	22.00	B	R	0.80
F45LN D080-07-25.40-R-N15	80.00	100.0	7	50.00	7.50	25.40	B	R	1.32
F45LN D080-07-27-L-N15	80.00	100.0	7	50.00	7.50	27.00	B	L	1.29
F45LN D080-07-27-R-N15	80.00	100.0	7	50.00	7.50	27.00	B	R	1.30
F45LN D080-10-25.40-R-N15	80.00	100.0	10	50.00	7.50	25.40	B	R	1.38
F45LN D080-10-27-L-N15	80.00	100.0	10	50.00	7.50	27.00	B	L	1.35
F45LN D080-10-27-R-N15	80.00	100.0	10	50.00	7.50	27.00	B	R	1.51
F45LN D100-08-31.75-R-N15	100.00	120.0	8	50.00	7.50	31.75	B	R	1.80
F45LN D100-08-32-L-N15	100.00	120.0	8	50.00	7.50	32.00	B	L	1.82
F45LN D100-08-32-R-N15	100.00	120.0	8	50.00	7.50	32.00	B	R	1.76
F45LN D100-12-31.75-R-N15	100.00	120.0	12	50.00	7.50	31.75	B	R	1.90
F45LN D100-12-32-L-N15	100.00	120.0	12	50.00	7.50	32.00	B	L	1.86
F45LN D100-12-32-R-N15	100.00	120.0	12	50.00	7.50	32.00	B	R	1.90
F45LN D125-09-38.10-R-N15	125.00	145.0	9	63.00	7.50	38.10	B	R	8.30
F45LN D125-09-40-L-N15	125.00	145.0	9	63.00	7.50	40.00	B	L	3.06
F45LN D125-09-40-R-N15	125.00	145.0	9	63.00	7.50	40.00	B	R	3.40
F45LN D125-15-38.10-R-N15	125.00	145.0	15	63.00	7.50	38.10	B	R	3.10
F45LN D125-15-40-L-N15	125.00	145.0	15	63.00	7.50	40.00	B	L	3.20
F45LN D125-15-40-R-N15	125.00	145.0	15	63.00	7.50	40.00	B	R	3.50
F45LN D160-12-40-L-N15	160.00	180.0	12	63.00	7.50	40.00	C	L	4.51
F45LN D160-12-40-R-N15	160.00	180.0	12	63.00	7.50	40.00	C	R	4.54
F45LN D160-12-50.80-R-N15	160.00	180.0	12	63.00	7.50	50.80	B	R	5.26
F45LN D160-20-40-R-N15	160.00	180.0	20	63.00	7.50	40.00	C	R	4.68
F45LN D160-20-50.80-R-N15	160.00	180.0	20	63.00	7.50	50.80	B	R	3.20
F45LN D200-14-60-L-N15	200.00	220.0	14	63.00	7.50	60.00	C	L	7.15
F45LN D200-14-60-R-N15	200.00	220.0	14	63.00	7.50	60.00	C	R	7.15
F45LN D200-25-60-R-N15	200.00	220.0	25	63.00	7.50	60.00	C	R	7.30

F45LN D250-16-60-R-N15	250.00	270.0	16	63.00	7.50	60.00	C	R	10.40
F45LN D250-30-60-R-N15	250.00	270.0	30	63.00	7.50	60.00	C	R	10.82

Note: left-hand cutters are designated by a red groove