





SOE45 8/16 : 45° endmills using square or octagonal double-sided inserts with 8/16 cutting edges (HELIDO 845 line).

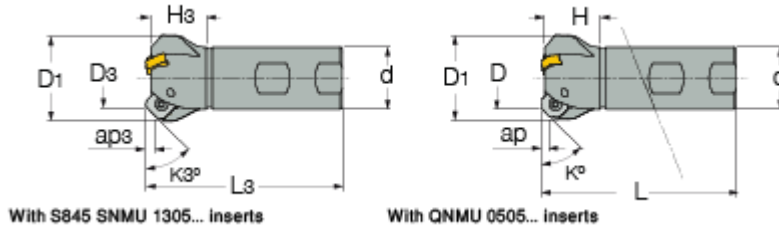

Designation	D	D1	Z	L	ap	H	K°/b>	D3	L3	ap3	H3	K3°/b>	d	Shank	Kg
SOE45 8/16-D025-02-W20R	25.00	35.0	2	100.00	3.50	30.00	44	22.65	101.20	6.00	31.20	45	25.00	W	0.10
SOE45 8/16-D032-03-W25R	32.00	42.0	3	100.00	3.50	30.00	44	29.65	101.20	6.00	31.20	45	32.00	W	0.25
SOE45 8/16-D040-04-W32R	40.00	50.0	4	110.00	3.50	35.00	44	37.65	111.20	6.00	36.20	45	40.00	W	0.20

D3+ap3+H3+L3+K3° dimensions when S845 SNMU 1305.. inserts are used.

For adaptation click on "More Info". on "More Info".