





E90X : Endmills with square Q/S/XOMT inserts.

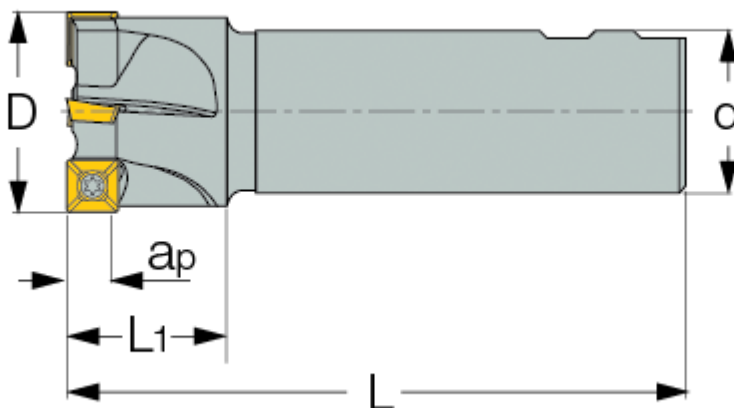

Designation	D	Z	ap	L1	L	d	Shank	Rd?/b>	Kg
E90X D08-C10-06	8.00	1	5.80	16.0	70.00	10.00	C	0.5	0.04
E90X D08-W12-06	8.00	1	5.80	16.0	70.00	12.00	W	0.5	0.05
E90X D10-C10-06	10.00	1	5.80	20.0	80.00	10.00	C	1.0	0.04
E90X D10-W12-06	10.00	1	5.80	20.0	70.00	12.00	W	1.0	0.05
E90X D12-C16-06	12.00	1	5.80	22.0	80.00	16.00	C	90.0	0.10
E90X D12-W16-06	12.00	1	5.80	22.0	70.00	16.00	W	90.0	0.08
E90X D14-C16-06	14.00	2	5.80	20.0	80.00	16.00	C	-	0.11
E90X D14-W16-06	14.00	2	5.80	22.0	70.00	16.00	W	-	0.09
E90X D16-C16-06	16.00	2	5.80	20.0	90.00	16.00	C	3.5	0.12
E90X D16-W16-06	16.00	2	5.80	20.0	70.00	16.00	W	3.5	0.10
E90X D18-W20-06	18.00	2	5.80	20.0	80.00	20.00	W	3.0	0.17
E90X D20-C20-06	20.00	3	5.80	22.0	110.00	20.00	C	3.0	0.18
E90X D20-W20-06	20.00	3	5.80	22.0	80.00	20.00	W	3.0	0.17
E90X D25-C20-06	25.00	4	5.80	25.0	120.00	20.00	C	2.5	0.29
E90X D25-W20-06	25.00	4	5.80	25.0	80.00	20.00	W	2.5	0.19
E90X D32-W25-06	32.00	5	5.80	25.0	90.00	25.00	W	3.8	0.34

For adaptation, click on "More Info".