




ECR-T-M : 4 flute, 20° helix medium length Solid carbide roughing endmills. Used for high stock removal rates on high temperature

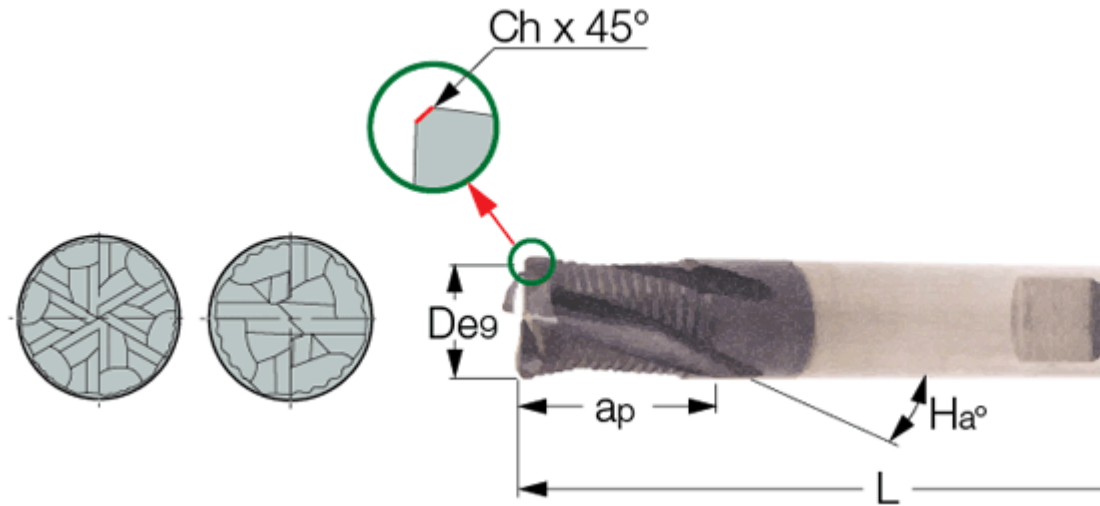

Designation	D	d	ap	L	Flute	Ha°	Rd°	Shank	Ch	fz(min)	fz(max)	Grade
ECR-T4M 06-10-C06-57	6.00	6.00	10.00	57.00	4	20.0	5.0	C	0.30	0.03	0.06	IC900
ECR-T4M 06-10-W06-57	6.00	6.00	10.00	57.00	4	20.0	5.0	W	0.30	0.03	0.06	IC900
ECR-T4M 08-16-C08-63	8.00	8.00	16.00	63.00	4	20.0	5.0	C	0.40	0.03	0.08	IC900
ECR-T4M 08-16-W08-63	8.00	8.00	16.00	63.00	4	20.0	5.0	W	0.40	0.03	0.08	IC900
ECR-T4M 10-20-C10-72	10.00	10.00	20.00	72.00	4	20.0	5.0	C	0.40	0.03	0.09	IC900
ECR-T4M 10-20-W10-72	10.00	10.00	20.00	72.00	4	20.0	5.0	W	0.40	0.03	0.09	IC900
ECR-T4M 12-24-C12-83	12.00	12.00	24.00	83.00	4	20.0	5.0	C	0.40	0.04	0.10	IC900
ECR-T4M 12-24-W12-83	12.00	12.00	24.00	83.00	4	20.0	5.0	W	0.40	0.04	0.10	IC900
ECR-T4M 16-32-C16-92	16.00	16.00	32.00	92.00	4	20.0	5.0	C	0.50	0.05	0.11	IC900
ECR-T4M 16-32-W16-92	16.00	16.00	32.00	92.00	4	20.0	5.0	W	0.50	0.05	0.11	IC900
ECR-T4M 20-40-C20-104	20.00	20.00	40.00	104.00	4	20.0	5.0	C	0.50	0.05	0.11	IC900
ECR-T4M 20-40-W20-104	20.00	20.00	40.00	104.00	4	20.0	5.0	W	0.50	0.05	0.11	IC900