





ECA-B-2 : 2 flute, 45°helix medium length solid carbide endmills. Used for machining aluminum.

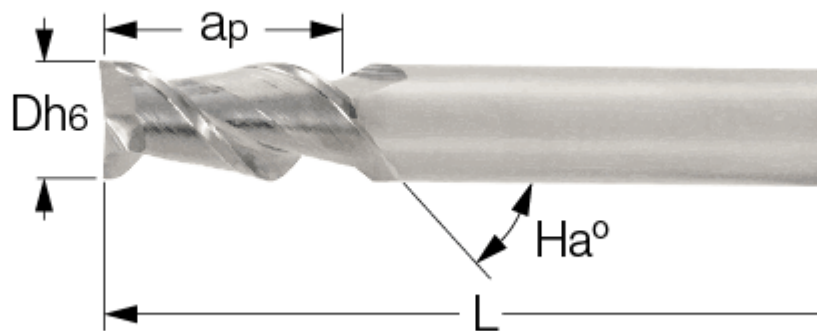

Aluminum



Designation	D	d	ap	L	Flute	Ha°/b>	Rd°/b>	Shank	fz(min)	fz(max)	Grade
ECA040B12-2C06	4.00	6.00	12.00	57.00	2	45.0	5.0	C	0.02	0.05	IC08
ECA050B14-2C06	5.00	6.00	14.00	57.00	2	45.0	5.0	C	0.02	0.06	IC08
ECA060B16-2C06	6.00	6.00	16.00	57.00	2	45.0	5.0	C	0.03	0.07	IC08
ECA080B20-2C08	8.00	8.00	20.00	63.00	2	45.0	5.0	C	0.03	0.09	IC08
ECA100B22-2C10	10.00	10.00	22.00	72.00	2	45.0	5.0	C	0.03	0.10	IC08
ECA120B25-2C12	12.00	12.00	25.00	83.00	2	45.0	5.0	C	0.04	0.11	IC08
ECA160B32-2C16	16.00	16.00	32.00	92.00	2	45.0	5.0	C	0.05	0.13	IC08
ECA200B38-2C20	20.00	20.00	38.00	104.00	2	45.0	5.0	C	0.05	0.13	IC08

Special design for aluminum