





**HCE-MM** : BALLPLUS, multifunction endmills with a MULTI-MASTER threaded ddaptation which can carry ball nose, 90° and toroidal

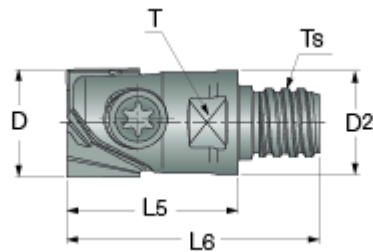

| Designation       | D     | L6    | L5    | Ts  | D3    | T    | Kg   |
|-------------------|-------|-------|-------|-----|-------|------|------|
| HCE D12/.50-MMT08 | 12.00 | 28.00 | 20.00 | T8  | 11.50 | 10.0 | 0.00 |
| HCE D16/.62-MMT10 | 16.00 | 36.75 | 25.00 | T10 | 15.20 | 13.0 | 0.12 |
| HCE D20/.75-MMT12 | 20.00 | 48.80 | 35.00 | T12 | 18.50 | 15.0 | 1.40 |

For undercutting use HTR inserts only.

The dimensions are for HCC inserts with  $r=0.5$  mm (.02").

For tightening torque click on "More Info".