





RM-BNT-3D/5D/8D (Shanks) : Shanks for BAYO T-REAM interchangeable head reamers

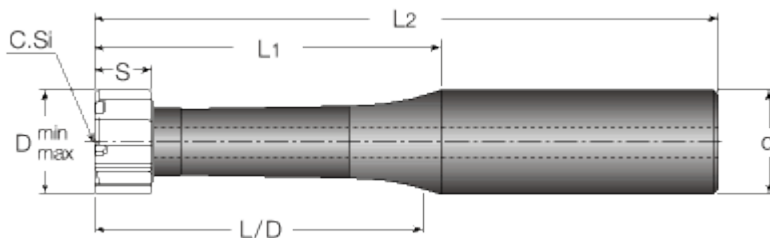

Designation	L/D	D min	D max	S	L2	L1	d	Shank	Shank m.	CSI
RM-BNT5-3D-16C	3.00	11.50	13.50	9.30	97.8	49.8	16.00	C	S	BN5
RM-BNT6-3D-16C	3.00	13.51	16.00	9.40	105.4	57.4	16.00	C	S	BN6
RM-BNT7-3D-20C	3.00	16.01	20.00	10.60	120.6	70.6	20.00	C	S	BN7
RM-BNT8-3D-20C	3.00	20.01	25.40	12.80	137.8	87.8	20.00	C	S	BN8
RM-BNT9-3D-25C	3.00	25.41	32.00	12.80	150.2	94.2	25.00	C	S	BN9
RM-BNT9-3D-32C	3.00	26.00	32.00	12.80	167.1	107.1	32.00	C	S	BN9
RM-BNT5-5D-16C	5.00	11.50	13.50	9.30	125.0	77.0	16.00	C	S	BN5
RM-BNT6-5D-16C	5.00	13.51	16.00	9.40	137.4	89.4	16.00	C	S	BN6
RM-BNT7-5D-20C	5.00	16.01	20.00	10.60	160.6	110.6	20.00	C	S	BN7
RM-BNT8-5D-20C	5.00	20.01	25.40	12.80	187.8	137.8	20.00	C	S	BN8
RM-BNT9-5D-32C	5.00	25.41	32.00	12.80	231.1	171.1	32.00	C	S	BN9
RM-BNT5-8D-16C	8.00	11.50	13.50	9.30	165.5	117.5	16.00	C	S	BN5
RM-BNT6-8D-16C	8.00	13.51	16.00	9.40	185.4	137.4	16.00	C	S	BN6
RM-BNT7-8D-20C	8.00	16.01	20.00	10.60	220.6	170.6	20.00	C	S	BN7
RM-BNT8-8D-20C	8.00	20.01	25.40	12.80	262.8	212.8	20.00	C	S	BN8
RM-BNT9-8D-32C	8.00	25.41	32.00	12.80	327.1	267.1	32.00	C	S	BN9