





MTSR-C-SINGLE : Indexable threading endmills with cylindrical carbide shanks, and coolant holes for single point inserts.

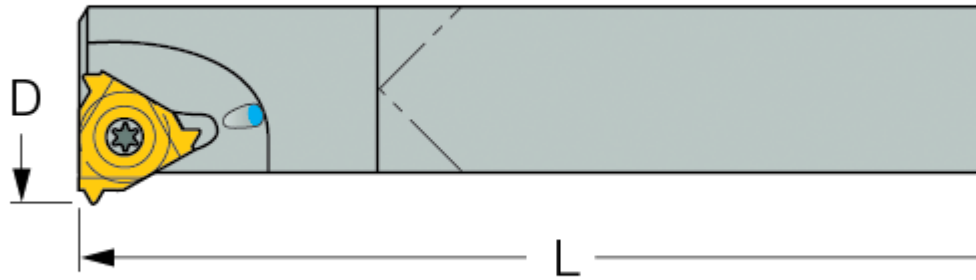

Designation	Pmin	Pmax	TPI max	TPI min	D	d	L	Coolant	Kg	Shank
MTSR 0005 D06C	0.50	1.25	48	20	6.80	5.00	63.00	N	0.04	C
MTSR 0006 H08C	0.50	1.75	48	14	8.80	6.00	100.00	Y	0.05	C
MTSR 0010 M11C	0.50	2.00	48	11	13.20	10.00	150.00	Y	0.17	C

Minimum bore should be one-third larger than D

For adaptation click on "More Info"