





MTSR-Double Insert : Double insert threading endmills with Weldon shanks.

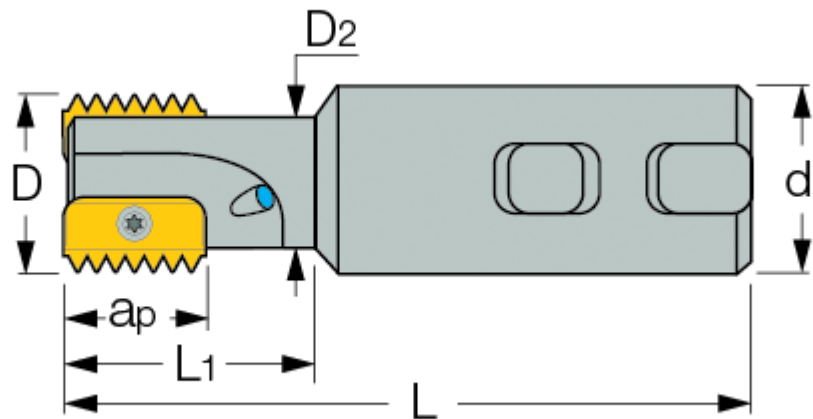

Designation	ap	D	d	D2	L1	L	Shank	Nxcm	Kg
MTSR 0020 H14-2	14.00	20.00	20.00	16.00	41.0	93.00	W	128	0.18
MTSR 0030 J21-2	21.00	30.00	25.00	24.00	52.0	108.00	W	515	0.37
MTSR 0040 L30-2	30.00	40.00	32.00	30.00	70.0	130.00	W	1,020	0.69
MTSR 0050 M40-2	40.00	50.00	40.00	38.00	78.0	153.00	W	1,020	1.22

For adaptation click on "More Info".

Minimum bore should be one-third larger than D

All endmills are equipped with a bore for internal coolant