






MTECZ-BSF/BSP : Solid carbide threading endmills with coolant holes located in the flutes, used for internal BSF/BSP th



Whitworth
Application:
General Engineering, Fittings and
Pipe Couplings

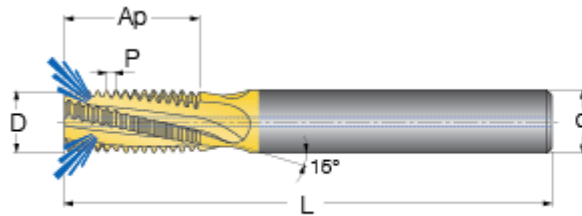

Application: General engineering fittings and pipe couplings



Designation	TPI	BSP	d	Shank	D	Flute	ap	L	Grade
MTECZ 08078C14 28W	28.0	G1/8	8.00	C	7.80	3	14.10	64.00	IC908
MTECZ 1010D16 19W	19.0	G1/4-3/8	10.00	C	10.00	4	16.70	73.00	IC908
MTECZ 1616E26 14W	14.0	G1/2-7/8	16.00	C	16.00	5	26.30	101.00	IC908
MTECZ 1616D38 11W	11.0	G>1	16.00	C	16.00	4	38.10	101.00	IC908

With internal coolant hole