





MTECQ UN : Solid carbide endmills with internal coolant holes and a reduced diameter neck. Used for deep internal, large pitch UN (up to 3D), on medium and large thread diameters.

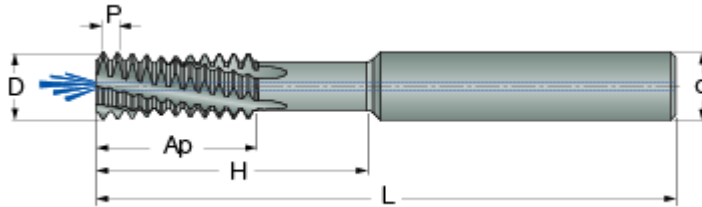

Designation	TPI	Thread	d	D	Flute	ap	H	L	Shank	Grade
MTECQ 1010D30 20UN	20.0	>=12	10.00	10.00	4	17.80	30.50	73.00	C	IC908
MTECQ 1212E35 20UN	20.0	>=14	12.00	12.00	5	20.30	35.60	84.00	C	IC908
MTECQ 1616F43 20UN	20.0	>=18	16.00	16.00	6	25.40	43.20	105.00	C	IC908
MTECQ 1212D35 18UN	18.0	>=15	12.00	12.00	4	19.70	35.30	84.00	C	IC908
MTECQ 1212D35 16UN	16.0	>=15	12.00	12.00	4	20.70	35.00	84.00	C	IC908
MTECQ 1616E42 16UN	16.0	>=19	16.00	16.00	5	25.40	42.90	105.00	C	IC908
MTECQ 2020F58 16UN	16.0	>=23	20.00	20.00	6	36.60	58.80	105.00	C	IC908
MTECQ 1616E45 14UN	14.0	>=20	16.00	16.00	5	25.40	45.30	105.00	C	IC908
MTECQ 1212D42 12UN	12.0	>=16	12.00	12.00	4	25.40	25.30	84.00	C	IC908
MTECQ 2020E55 12UN	12.0	>=24	20.00	20.00	5	33.90	55.10	105.00	C	IC908