





GEHIMR/L-SC : Internal machining carbide bars with a coolant holes. Using GEMI and GEPI inserts in widths smaller than 1.9 mm supported).

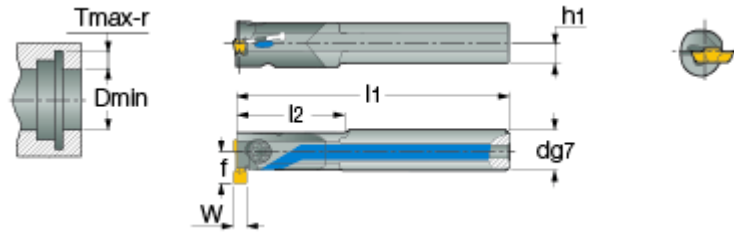

Right-hand shown



Designation	W min	W max	d	D min	Tmax-r	l1	l2	f	h1	Inlet
GEHIML 10SC-13	0.80	1.90	10.00	12.50	2.50	125.00	30.0	7.6	5.0	3.5 mm
GEHIMR 10SC-13	0.80	1.90	10.00	12.50	2.50	125.00	30.0	7.6	5.0	3.5 mm
GEHIML 12SC-14	0.80	1.90	12.00	14.00	2.50	125.00	40.0	9.0	6.0	6.0 mm
GEHIMR 12SC-14	0.80	1.90	12.00	14.00	2.50	125.00	40.0	9.0	6.0	6.0 mm
GEHIML 16SC-13	0.80	1.90	16.00	12.50	2.50	125.00	35.0	10.6	7.5	M6
GEHIMR 16SC-13	0.80	1.90	16.00	12.50	2.50	125.00	35.0	10.6	7.5	M6
GEHIML 16SC-14	0.80	1.90	16.00	14.00	2.50	140.00	40.0	10.9	7.5	M6
GEHIMR 16SC-14	0.80	1.90	16.00	14.00	2.50	140.00	40.0	10.9	7.5	M6
GEHIML 16SC-16	0.80	1.90	16.00	16.00	2.50	160.00	70.0	10.5	7.5	M6
GEHIMR 16SC-16	0.80	1.90	16.00	16.00	2.50	160.00	70.0	10.5	7.5	M6