




Designation	SS	d2	D1	L	L1	L4	L2	L3	J	G	Kg
FITBORE BT40 EM16	40	16	72	123.5	96.5	71	26.5	46.5	M10	M16	3.74
FITBORE BT40 EM16 B	40	16	72	123.5	96.5	71	26.5	46.5	M10	M16	0.02
FITBORE BT40 EM20	40	20	72	123.5	96.5	71	26.5	46.5	M10	M16	3.7
FITBORE BT40 EM20 B	40	20	72	123.5	96.5	71	26.5	46.5	M10	M16	0.02
FITBORE BT40 EM25	40	25	72	123.5	96.5	71	26.5	46.5	M10	M16	3.59
FITBORE BT40 EM25 B	40	25	72	123.5	96.5	71	26.5	46.5	M10	M16	3.6
FITBORE BT40 EM32	40	32	72	123.5	96.5	71	26.5	46.5	M10	M16	3.43
FITBORE BT40 EM32 B	40	32	72	123.5	96.5	71	26.5	46.5	M10	M16	3.41
FITBORE BT40 EM40	40	40	72	123.5	96.5	71	26.5	46.5	M10	M16	3.2
FITBORE BT50 EM16	50	16	72	134.5	96.5	71	26.5	46.5	M10	M24	6.4
FITBORE BT50 EM20	50	20	72	134.5	96.5	71	26.5	46.5	M10	M24	6.38
FITBORE BT50 EM25	50	25	72	134.5	96.5	71	26.5	46.5	M10	M24	6.3
FITBORE BT50 EM25 B	50	25	72	134.5	96.5	71	26.5	46.5	M10	M24	6.3
FITBORE BT50 EM32	50	32	72	134.5	96.5	71	26.5	46.5	M10	M24	6.1
FITBORE BT50 EM40	50	40	72	134.5	96.5	71	26.5	46.5	M10	M24	5.83
FITBORE BT50 EM40 B	50	40	72	134.5	96.5	71	26.5	46.5	M10	M24	3.5

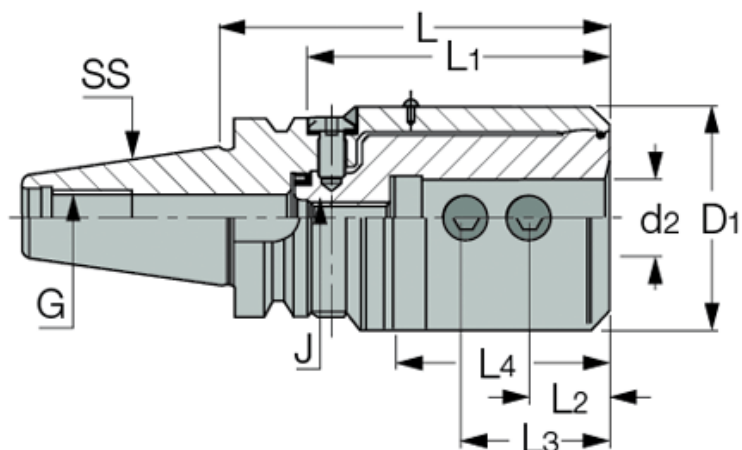

For Adaptation Click on "More Info".

B is the designation for coolant through flange.