


DIN69871-SRKIN : SHRINKIN thermal chucking collet with integral DIN 69871 form AD/B taper shank. Can be used for carbide and HSS tools.

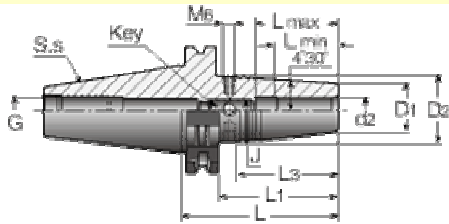

Designation	SS	d2	D1	D2	L	L1	L3	L min	L max	J	Key	G	Kg
DIN69871 40 SRKIN 6X80	40	6	21	27	80	60.9	38	25	36	M5	2.5	M16	1.07
DIN69871 40 SRKIN 6X80 B	40	6	21	27	80	60.9	38	25	36	M5	2.5	M16	1.06
DIN69871 40 SRKIN 8X80	40	8	21	27	80	60.9	38	25	36	M6	3	M16	1.06
DIN69871 40 SRKIN 10X80	40	10	24	32	80	60.9	50.5	31	42	M8	4	M16	0.72
DIN69871 40 SRKIN 10X80 B	40	10	24	32	80	60.9	50.5	31	42	M8	4	M16	1.11
DIN69871 40 SRKIN 12X80	40	12	24	32	80	60.9	50.5	31	47	M10	5	M16	1.11
DIN69871 40 SRKIN 12X80 B	40	12	24	32	80	60.9	50.5	31	47	M10	5	M16	1.1
DIN69871 40 SRKIN 14X80	40	14	27	34	80	60.9	44.2	36	47	M10	5	M16	1.15
DIN69871 40 SRKIN 14X80 B	40	14	27	34	80	60.9	44.2	36	47	M10	5	M16	0
DIN69871 40 SRKIN 16X80	40	16	27	34	80	60.9	44.2	39	50	M12	6	M16	1.12
DIN69871 40 SRKIN 16X80 B	40	16	27	34	80	60.9	44.2	39	50	M12	6	M16	1.12
DIN69871 40 SRKIN 18X80	40	18	33	42	80	60.9	57	39	50	M12	6	M16	1.2
DIN69871 40 SRKIN 20X80	40	20	33	42	80	60.9	57	41	52	M16	8	M16	1.24
DIN69871 40 SRKIN 20X80 B	40	20	33	42	80	60.9	57	41	52	M16	8	M16	1.23
DIN69871 40 SRKIN 25X100	40	25	44	53	100	80.9	57	47	58	M20	8	M16	1.78
DIN69871 50 SRKIN 6X 80	50	6	21	27	80	60.9	38	25	36	M5	2.5	M24	2.89
DIN69871 50 SRKIN 8X 80	50	8	21	27	80	60.9	38	25	36	M6	3	M24	2.9
DIN69871 50 SRKIN 10X 80	50	10	24	32	80	60.9	51	31	42	M8	4	M24	2.94
DIN69871 50 SRKIN 12X 80	50	12	24	32	80	60.9	51	36	47	M10	5	M24	3.2
DIN69871 50 SRKIN 14X 80	50	14	27	34	80	60.9	45	36	47	M10	5	M24	2.98
DIN69871 50 SRKIN 16X 80	50	16	27	34	80	60.9	45	39	50	M12	6	M24	2.94
DIN69871 50 SRKIN 18X 80	50	18	33	42	80	60.9	57	39	50	M12	6	M24	3.09
DIN69871 50 SRKIN 20X 80	50	20	33	42	80	60.9	57	41	52	M16	8	M24	3.06
DIN69871 50 SRKIN 20X 80B	50	20	33	42	80	60.9	57	41	52	M16	8	M24	3
DIN69871 50 SRKIN 25X100	50	25	44	53	100	80.9	57	47	58	M16	8	M24	3.66
DIN69871 50 SRKIN 25X100B	50	25	44	53	100	80.9	57	47	58	M16	8	M24	4.2
DIN69871 50 SRKIN 32X100	50	32	44	53	100	80.9	57	47	58	M18	8	M24	3.52

Can be used for carbide and HSS tools.

Use only inductive heating device for SRKIN holders.

B is the designation for coolant through flange.

For shrink units information, Click on "More Info".

ISCAR can not guarantee an unbalance value less than 1 gr x mm.