


DIN69871-SRK : SHRINKIN thermal shrinking chucks with DIN 69871 form AD/B taper shanks. For carbide tools only.

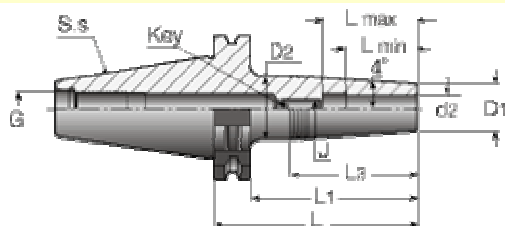

Designation	SS	d2	D1	D2	L	L1	L3	L min	L max	J	Key	G	Kg
DIN69871 40 SRK 3X50	40	3	10	15	69.1	50	35.5	10	16	M6	3	M16	0.9
DIN69871 40 SRK 3X85	40	3	10	19	104.1	85	64.1	10	16	M6	3	M16	0.96
DIN69871 40 SRK 4X50	40	4	10	15	69.1	50	35.5	12	18	M6	3	M16	0.9
DIN69871 40 SRK 4X85	40	4	10	19	104.1	85	64.1	12	18	M6	3	M16	0.96
DIN69871 40 SRK 5X50	40	5	10	15	69.1	50	35.5	15	21	M6	3	M16	0.9
DIN69871 40 SRK 5X85	40	5	10	19	104.1	85	64.1	12	18	M6	3	M16	0.97
DIN69871 40 SRK 6X50	40	6	11	16	69.1	50	35.5	18	24	M8	4	M16	0.9
DIN69871 40 SRK 6X85	40	6	11	20	104.1	85	64.1	18	24	M8	4	M16	0.96
DIN69871 40 SRK 8X50	40	8	20	14	69.1	50	42.5	25	31	M10	5	M16	0.93
DIN69871 40 SRK 8X85	40	8	23	14	104.1	85	63.9	25	31	M10	5	M16	1.01
DIN69871 40 SRK 10X50	40	10	16	22	69.1	50	42.4	30	36	M12	6	M16	0.93
DIN69871 40 SRK 10X85	40	10	16	24.5	104.1	85	60.3	30	36	M12	6	M16	1.02
DIN69871 40 SRK 12X50	40	12	20	26	69.1	50	42.3	32	42	M10	5	M16	0.98
DIN69871 40 SRK 12X85	40	12	20	28	104.1	85	56.6	32	42	M10	5	M16	1.11
DIN69871 40 SRK 16X50	40	16	24	29	69.1	50	43	35	45	M10	5	M16	1

To be used for carbide tools only.

Balanced to G2.5/25,000 RPM.

For shrink units information, Click on "More Info".

ISCAR can not guarantee an unbalance value less than 1 gr x mm.

Preset screw without coolant hole.