


DIN69871-HYDRO : Hydraulic chucks with DIN69781 Form ADB shanks (HYDROFIT).

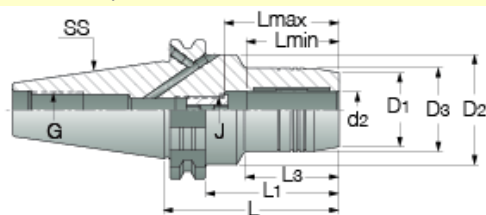

Designation	SS	d2	D1	D3	D2	L	L1	L3	L min	L max	J	G	Kg
DIN69871 30 HYDRO 6X60	30	6	23	26	45	60	41	25	27	37	M5	M12	0.42
DIN69871 30 HYDRO 8X64	30	8	25	28	45	64	45	29	27	37	M6	M12	0
DIN69871 30 HYDRO 10X64	30	10	27	30	45	64	45	35	32	42	M8X1	M12	0
DIN69871 30 HYDRO 12X72	30	12	29	32	45	72	53	43	37	47	M10X1	M12	0
DIN69871 30 HYDRO 14X72	30	14	30	34	45	72	53	42	37	47	M10X1	M12	0
DIN69871 30 HYDRO 16X90	30	16	34	38	45	90	71	43	42	52	M12X1	M12	1.3
DIN69871 30 HYDRO 18X90	30	18	36	40	45	90	71	43	42	52	M12X1	M12	0
DIN69871 30 HYDRO 20X90	30	20	38	42	45	90	71	-	42	52	M12X1	M12	1
DIN69871 40 HYDRO 6X68	40	6	23	26	50	68	49	33	27	38	M5	M16	1.16
DIN69871 40 HYDRO 8X68	40	8	25	28	50	68	49	33	27	37	M6	M16	1.18
DIN69871 40 HYDRO 10X72	40	10	27	30	50	72	53	37	32	42	M8X1	M16	1.21
DIN69871 40 HYDRO 12X77	40	12	29	32	50	77	58	42	37	47	M10X1	M16	1.34
DIN69871 40 HYDRO 14X77	40	14	30	34	50	77	58	42	37	47	M10X1	M16	0.56
DIN69871 40 HYDRO 16X80	40	16	34	38	50	80	61	43	42	52	M12X1	M16	1.34
DIN69871 40 HYDRO 18X80	40	18	36	40	50	80	61	43	42	52	M12X1	M16	1.36
DIN69871 40 HYDRO 20X82	40	20	38	42	50	82	63	47	42	52	M12X1	M16	1.41
DIN69871 40 HYDRO 25X117	40	25	46	50	63	117	98	51	48	58	M16X1	M16	2.13
DIN69871 40 HYDRO 32X117	40	32	56	60	63	117	98	56	52	62	M16X1	M16	2.44
DIN69871 50 HYDRO 6X68	50	6	23	26	80	68	49	33	27	37	M5	M24	1.2
DIN69871 50 HYDRO 8X68	50	8	25	28	80	68	49	33	27	37	M6	M24	0
DIN69871 50 HYDRO 10X72	50	10	27	30	80	72	53	37	32	42	M8X1	M24	3.3
DIN69871 50 HYDRO 12X77	50	12	29	32	80	77	58	42	37	47	M10X1	M24	3.35
DIN69871 50 HYDRO 14X77	50	14	30	34	80	77	58	42	37	47	M10X1	M24	3
DIN69871 50 HYDRO 16X80	50	16	34	38	80	80	61	45	42	52	M12X1	M24	3.42
DIN69871 50 HYDRO 18X80	50	18	36	40	80	80	61	45	42	52	M12X1	M24	0
DIN69871 50 HYDRO 20X82	50	20	38	42	80	82	63	47	42	52	M16X1	M24	3.5
DIN69871 50 HYDRO 25X87	50	25	46	50	80	87	68	52	48	58	M16X1	M24	3.7
DIN69871 50 HYDRO 32X91	50	32	56	60	80	91	72	56	54	64	M16X1	M24	4.01

Clamping wrench (wrench HYDRO HEX 4) should be ordered separately.

Chucking forces will be reduced by 25% if reduction sleeves are used (ordered separately).

Note: Reduction sleeves are available for 12, 20, 25 and 32 mm bore diameters.

The coolant passages in the B type flange are blocked with screws which can be removed when required.