







SLANR/L-TANG : Screw clamped toolholders for LNMX tangentially clamped inserts. Recommended for heavy longitudinal and face

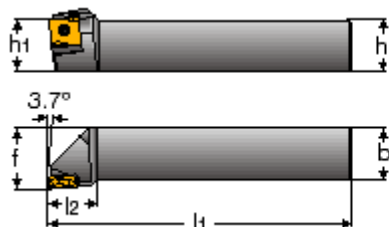

16mm shank configuration

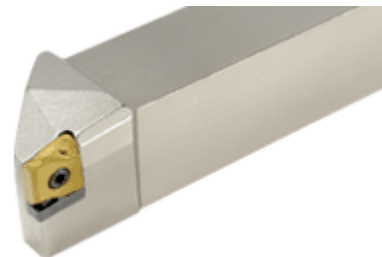

Right-hand shown



Designation	h	h1	b	l1	l2	f	Ga°	Gr°
SLANL 1616H-11 TANG	16.0	16.0	16.0	100.00	20.0	20.0	-6	-6
SLANL 1616M-11S TANG	16.0	16.0	16.0	150.00	24.3	16.0	-6	-6
SLANR 1616H-11 TANG	16.0	16.0	16.0	100.00	20.0	20.0	-6	-6
SLANR 1616M-11S TANG	16.0	16.0	16.0	150.00	24.3	16.0	-6	-6
SLANL 2020K-11 TANG	20.0	20.0	20.0	125.00	25.0	25.0	-6	-6
SLANR 2020K-11 TANG	20.0	20.0	20.0	125.00	25.0	25.0	-6	-6
SLANL 2525M-11 TANG	25.0	25.0	25.0	150.00	25.0	30.0	-6	-6
SLANR 2525M-11 TANG	25.0	25.0	25.0	150.00	25.0	30.0	-6	-6
SLANL 2020K-15 TANG	20.0	20.0	20.0	100.00	25.0	25.0	-6	-6
SLANR 2020K-15 TANG	20.0	20.0	20.0	100.00	25.0	25.0	-6	-6
SLANL 2525M-15 TANG	25.0	25.0	25.0	150.00	25.0	30.0	-6	-6
SLANR 2525M-15 TANG	25.0	25.0	25.0	150.00	25.0	30.0	-6	-6
SLANL 3232P-15 TANG	32.0	32.0	32.0	170.00	35.0	37.0	-6	-6
SLANR 3232P-15 TANG	32.0	32.0	32.0	170.00	35.0	37.0	-6	-6
SLANL 4040R-15 TANG	40.0	40.0	40.0	200.00	35.0	45.0	-6	-6
SLANR 4040R-15 TANG	40.0	40.0	40.0	200.00	35.0	45.0	-6	-6
SLANL 3232P-22 TANG	32.0	32.0	32.0	170.00	35.0	38.0	-6	-6
SLANR 3232P-22 TANG	32.0	32.0	32.0	170.00	35.0	38.0	-6	-6
SLANL 4040R-22 TANG	40.0	40.0	40.0	200.00	40.0	47.0	-6	-6
SLANR 4040R-22 TANG	40.0	40.0	40.0	200.00	40.0	47.0	-6	-6
SLANL 5050S-22 TANG	50.0	50.0	50.0	250.00	40.0	57.0	-6	-6
SLANR 5050S-22 TANG	50.0	50.0	50.0	250.00	40.0	57.0	-6	-6

ap max for facing: LNMX 11-2.8mm, LNMX 15-3.8mm, LNMX 22-5.8mm