





FGHR/L : Tools with internal coolant holes, very strong insert grip, used for interrupted cuts and back turning of aluminum wheels.

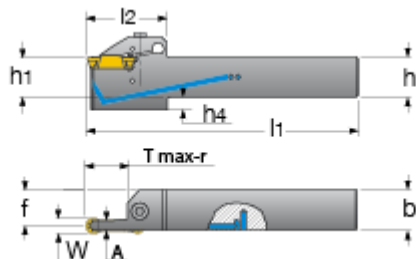

Right-hand shown



Designation	W	Tmax-r	h	h1	b	l1	f	A	l2	h4
FGHR 2525-6A	6.00	20.00	25.0	25.0	25.0	150.00	23.0	4.00	39.0	-
FGHL 2525C-8A	8.00	25.00	25.0	25.0	25.0	170.00	22.0	5.90	50.0	7.6
FGHR 2525C-8A	8.00	25.00	25.0	25.0	25.0	170.00	22.0	5.90	50.0	7.6