






GHDR/L (Short pocket) : External holder for turning, grooving & parting.

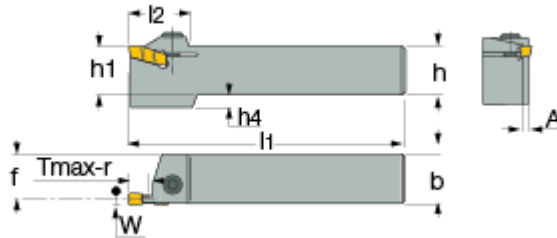

Right-hand shown



Designation	h	W min	W max	Tmax-r	h1	b	l1	l2	f	A	h4	R/L
GHDL 12-3	12.0	2.80	4.00	8.00	12.0	12.0	110.00	25.0	10.8	2.40	4.0	L
GHDR 12-3	12.0	2.80	4.00	8.00	12.0	12.0	110.00	25.0	10.8	2.40	4.0	R
GHDL 16-3	16.0	2.80	4.00	9.00	16.0	16.0	110.00	26.0	14.8	2.40	4.0	L
GHDR 16-3	16.0	2.80	4.00	9.00	16.0	16.0	110.00	26.0	14.8	2.40	4.0	R
GHDL 16-3 ST	16.0	2.80	4.00	9.00	16.0	16.0	78.00	24.0	15.0	2.20	4.0	L
GHDR 16-3 ST	16.0	2.80	4.00	9.00	16.0	16.0	78.00	24.0	15.0	2.20	4.0	R
GHDL 20-3	20.0	2.80	4.00	9.00	20.0	20.0	120.00	26.0	18.8	2.40	-	L
GHDR 20-3	20.0	2.80	4.00	9.00	20.0	20.0	120.00	26.0	18.8	2.40	-	R
GHDL 25-3	25.0	2.80	4.00	9.00	25.0	25.0	135.00	26.0	23.8	2.40	-	L
GHDR 25-3	25.0	2.80	4.00	9.00	25.0	25.0	135.00	26.0	23.8	2.40	-	R
GHDL 16-4	16.0	4.00	5.00	10.00	16.0	16.0	110.00	26.0	14.2	3.20	4.0	L
GHDR 16-4	16.0	4.00	5.00	10.00	16.0	16.0	110.00	26.0	14.2	3.20	4.0	R
GHDL 16-4 ST	16.0	4.00	5.40	10.00	16.0	16.0	78.00	23.6	14.0	3.40	4.0	L
GHDR 16-4 ST	16.0	4.00	5.40	10.00	16.0	16.0	78.00	23.6	14.0	3.40	4.0	R
GHDL 20-4	20.0	4.00	5.00	10.00	20.0	20.0	120.00	26.0	18.2	3.20	-	L
GHDR 20-4	20.0	4.00	5.00	10.00	20.0	20.0	120.00	26.0	18.2	3.20	-	R
GHDL 25-4	25.0	4.00	5.00	10.00	25.0	25.0	135.00	27.0	23.2	3.20	-	L
GHDR 25-4	25.0	4.00	5.00	10.00	25.0	25.0	135.00	27.0	23.2	3.20	-	R
GHDL 32-4	32.0	4.00	5.00	10.00	32.0	32.0	150.00	27.0	30.2	3.20	-	L
GHDR 32-4	32.0	4.00	5.00	10.00	32.0	32.0	150.00	27.0	30.2	3.20	-	R
GHDL 20-5	20.0	5.00	6.40	12.00	20.0	20.0	120.00	29.0	17.9	4.20	-	L
GHDR 20-5	20.0	5.00	6.40	12.00	20.0	20.0	120.00	29.0	17.9	4.20	-	R
GHDL 25-5	25.0	5.00	6.40	12.00	25.0	25.0	135.00	29.0	22.9	4.20	-	L
GHDR 25-5	25.0	5.00	6.40	12.00	25.0	25.0	135.00	29.0	22.9	4.20	-	R
GHDL 32-5	32.0	5.00	6.40	12.00	32.0	32.0	150.00	29.0	29.9	4.20	-	L
GHDR 32-5	32.0	5.00	6.40	12.00	32.0	32.0	150.00	29.0	29.9	4.20	-	R
GHDL 25-6	25.0	6.00	6.40	12.00	25.0	25.0	135.00	29.0	22.3	5.40	-	L
GHDR 25-6	25.0	6.00	6.40	12.00	25.0	25.0	135.00	29.0	22.3	5.40	-	R
GHDL 25-P8	25.0	7.00	10.00	16.50	25.0	25.0	150.00	35.7	21.8	6.50	-	L
GHDR 25-P8	25.0	7.00	10.00	16.50	25.0	25.0	150.00	35.7	21.8	6.50	-	R
GHDL 32-P8	32.0	7.00	10.00	16.50	32.0	32.0	170.00	35.7	28.8	6.50	-	L
GHDR 32-P8	32.0	7.00	10.00	16.50	32.0	32.0	170.00	35.7	28.8	6.50	-	R

For using TIP and GPV inserts, Toolholder seat needs to be modified according to insert profile to ensure clearance.

