





TGFH/R/L : Very rigid clamping. Enables machining at very high feed rates and provides excellent straightness and surface finish. R parting large diameter parts and for interrupted cuts. Excellent tool and pocket life.

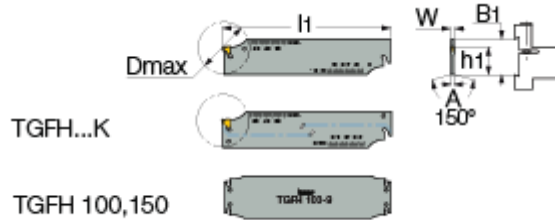

Designation	B1	W min	W max	A	l1	h1	D max	Coolant
TGFH 19-1.4	19.0	1.40	1.40	1.05	86.00	15.7	30.0	-
TGFH 19-2	19.0	1.80	2.40	1.65	86.00	15.7	38.0	-
TGFH 26-1.4	26.0	1.40	1.40	1.05	110.00	21.4	29.0	-
TGFH 26-2	26.0	1.80	2.40	1.65	110.00	21.4	50.0	-
TGFH 26-3	26.0	2.80	3.50	2.50	110.00	21.4	75.0	-
TGFH 26K-3	26.0	2.80	3.50	2.50	110.00	21.4	75.0	Y
TGFH 26-4	26.0	3.70	4.50	3.40	110.00	21.4	80.0	-
TGFH 26-5	26.0	4.70	5.50	4.00	110.00	21.4	80.0	-
TGFH 32-1.4	32.0	1.40	1.40	1.05	150.00	24.8	29.0	-
TGFH 32-2	32.0	1.80	2.40	1.65	150.00	24.8	50.0	-
TGFH 32-3	32.0	2.80	3.50	2.50	150.00	24.8	100.0	-
TGFH 32K-3	32.0	2.80	3.50	2.50	150.00	24.8	100.0	Y
TGFH 32-4	32.0	3.70	4.50	3.40	150.00	24.8	100.0	-
TGFH 32-5	32.0	4.70	5.50	4.00	150.00	24.8	120.0	-
TGFH 32-6	32.0	5.70	6.50	5.20	150.00	24.8	120.0	-
TGFH 32-7	32.0	6.80	7.50	6.00	148.00	24.8	120.0	-
TGFH 45-3	45.0	2.80	3.50	2.50	225.00	38.1	160.0	-
TGFH 45-4	45.0	3.70	4.50	3.40	225.00	38.1	160.0	-
TGFH 45-5	45.0	4.70	5.50	4.00	225.00	38.1	160.0	-
TGFH 45-6	45.0	5.70	6.50	5.20	225.00	38.1	160.0	-
TGFH 45-7	45.0	6.80	7.50	6.00	225.00	38.1	160.0	-
TGFH 52-7	52.6	6.80	7.50	6.00	190.00	45.2	190.0	-
TGFH 53-7	52.6	6.80	7.50	6.00	260.00	45.2	220.0	-
TGFH 52K-8	52.6	7.70	8.50	7.20	190.00	45.2	190.0	Y
TGFH 53K-8	52.6	7.70	8.50	7.20	260.00	45.2	215.0	Y
TGFH 52K-9	52.6	8.70	10.00	8.20	190.00	45.2	190.0	Y
TGFH 53K-9	52.6	8.70	10.00	8.20	260.00	45.2	215.0	Y
TGFHL 53K-12	52.6	12.70	12.70	10.00	260.00	45.2	215.0	Y
TGFHR 53K-12	52.6	12.70	12.70	10.00	260.00	45.2	215.0	Y
TGFH 100-9	100.0	8.70	10.00	8.20	460.00	92.5	450.0	-
TGFH 100-12	100.0	12.70	12.70	10.00	460.00	92.5	450.0	-
TGFH 150-12	150.0	12.70	12.70	10.00	610.00	142.5	600.0	-

For TGFH ..C-. and for TGFH 100-9 drawings, click "More Info"

