




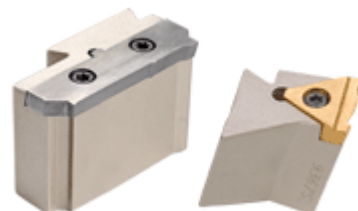

DT-A XNHN/R/L & DT-A FTHN/R/L : Semi-standard dovetail type holders, for XNUW and FTB wide profiling inserts.

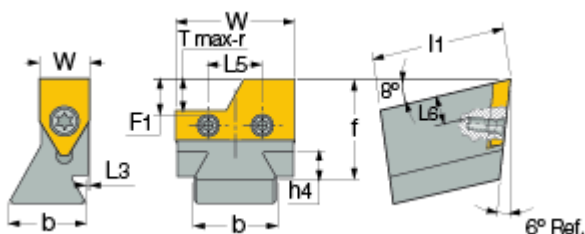

Designation	b	f	h4	l1	L3	W	F1	Tmax-r	L6	L5
DT20A XNHN-10	20.0	32.0	7.0	40.00	-	10.40	7.1	6.00	5.90	-
DT20A XNHL-10	20.0	32.0	7.0	40.00	1.00	10.40	7.1	6.00	5.90	-
DT20A XNHR-10	20.0	32.0	7.0	40.00	1.00	10.40	7.1	6.00	5.90	-
DT20A XNHN-13	20.0	32.0	7.0	40.00	-	13.08	7.3	6.00	5.00	-
DT20A XNHL-13	20.0	32.0	7.0	40.00	1.00	13.08	7.3	6.00	5.00	-
DT20A XNHR-13	20.0	32.0	7.0	40.00	1.00	13.08	7.3	6.00	5.00	-
DT20A XNHN-14	20.0	32.0	7.0	40.00	-	14.61	4.5	3.50	3.40	-
DT20A XNHN-20	20.0	32.0	7.0	40.00	-	20.60	7.4	6.00	5.00	-
DT20A XNHL-20	20.0	32.0	7.0	40.00	2.00	20.60	7.4	6.00	5.00	-
DT20A XNHR-20	20.0	32.0	7.0	40.00	2.00	20.60	7.4	6.00	5.00	-
DT20A XNHN-24	20.0	32.0	7.0	40.00	-	24.60	9.0	7.00	6.00	-
DT20A FTHN-30	20.0	32.0	7.0	40.00	-	30.40	11.6	10.00	9.00	14.00
DT20A FTHN-35	20.0	32.0	7.0	40.00	-	35.40	11.6	10.00	9.00	14.00
DT28A XNHN-13	28.0	32.0	9.0	40.00	-	13.08	7.3	6.00	5.00	-
DT28A XNHL-13	28.0	32.0	9.0	40.00	1.00	13.08	7.3	6.00	5.00	-
DT28A XNHR-13	28.0	32.0	9.0	40.00	1.00	13.08	7.3	6.00	5.00	-
DT28A XNHN-14	28.0	32.0	9.0	40.00	-	14.61	4.5	3.50	3.40	-
DT28A XNHL-14	28.0	32.0	9.0	40.00	1.00	14.61	4.5	3.50	3.40	-
DT28A XNHR-14	28.0	32.0	9.0	40.00	1.00	14.61	4.5	3.50	3.40	-
DT28A XNHN-20	28.0	32.0	9.0	40.00	-	10.60	7.4	6.00	5.00	-
DT28A XNHL-20	28.0	32.0	9.0	40.00	2.00	20.60	7.4	6.00	5.00	-
DT28A XNHR-20	28.0	32.0	9.0	40.00	2.00	20.60	7.4	6.00	5.00	-
DT28A XNHN-24	28.0	32.0	9.0	40.00	-	24.60	9.0	7.00	6.00	-
DT28A XNHL-24	28.0	32.0	9.0	40.00	2.00	24.60	9.0	7.00	6.00	-
DT28A XNHR-24	28.0	32.0	9.0	40.00	2.00	24.60	9.0	7.00	6.00	-
DT28A FTHN-30	28.0	32.0	9.0	40.00	-	30.40	11.6	10.00	9.00	14.00
DT28A FTHN-35	28.0	32.0	9.0	40.00	-	35.40	11.6	10.00	9.00	14.00
DT28A FTHN-40	28.0	32.0	9.0	40.00	-	40.40	11.6	10.00	9.00	18.00
DT28A FTHN-45	28.0	32.0	9.0	40.00	-	45.40	11.6	10.00	9.00	18.00
DT40A XNHN-13	40.0	36.0	11.0	50.00	-	13.08	7.3	5.00	5.00	-
DT40A XNHL-13	40.0	36.0	11.0	50.00	1.00	13.08	7.3	6.00	5.00	-
DT40A XNHR-13	40.0	36.0	11.0	50.00	1.00	13.08	7.3	6.00	5.00	-
DT40A XNHN-14	40.0	36.0	11.0	50.00	-	14.61	4.5	3.50	3.40	-
DT40A XNHL-14	40.0	36.0	11.0	50.00	1.00	14.61	4.5	3.50	3.40	-
DT40A XNHR-14	40.0	36.0	11.0	50.00	1.00	14.61	4.5	3.50	3.40	-
DT40A XNHN-20	40.0	36.0	11.0	50.00	-	20.60	7.4	6.00	5.00	-

DT40A XNHL-20	40.0	36.0	11.0	50.00	2.00	20.60	7.4	6.00	5.00	-
DT40A XNHR-20	40.0	36.0	11.0	50.00	2.00	20.60	7.4	6.00	5.00	-
DT40A XNHN-24	40.0	36.0	11.0	50.00	-	24.60	9.0	7.00	6.00	-
DT40A XNHL-24	40.0	36.0	11.0	50.00	2.00	24.60	9.0	7.00	6.00	-
DT40A XNHR-24	40.0	36.0	11.0	50.00	2.00	24.60	9.0	7.00	6.00	-
DT40A FTHN-30	40.0	36.0	11.0	50.00	-	30.40	11.6	10.00	9.00	14.00
DT40A FTHL-30	40.0	36.0	11.0	50.00	3.00	30.40	11.6	10.00	9.00	14.00
DT40A FTHR-30	40.0	36.0	11.0	50.00	3.00	30.40	11.6	10.00	9.00	14.00
DT40A FTHN-35	40.0	36.0	11.0	50.00	-	35.40	11.6	10.00	9.00	14.00
DT40A FTHL-35	40.0	36.0	11.0	50.00	3.00	35.40	11.6	10.00	9.00	14.00
DT40A FTHR-35	40.0	36.0	11.0	50.00	3.00	35.40	11.6	10.00	9.00	14.00
DT40A FTHN-40	40.0	36.0	11.0	50.00	-	40.40	11.6	10.00	9.00	14.00
DT40A FTHN-45	40.0	36.0	11.0	50.00	-	45.40	11.6	10.00	9.00	14.00

