






TGSU : Very rigid clamping. Enables machining at very high feed rates and provides excellent straightness and surface finish. The blade has a wide cutting edge, a wide chip breaker, a wide chip breaker jaw and a flat top, which allows for ZERO chip interference.

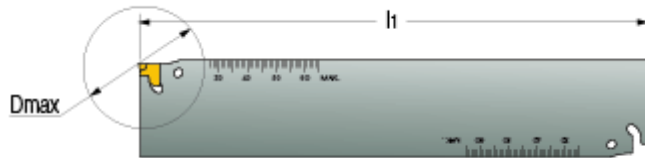

Designation	B1	W	A	l1	h1	D max
TGSU 35-1.4	35.0	1.40	1.05	180.00	33.2	35.0
TGSU 35-2	35.0	2.00	1.65	160.00	33.2	59.5
TGSU 35-3	35.0	3.00	2.50	180.00	33.2	120.0
TGSU 35-4	35.0	4.00	3.40	180.00	33.2	120.0
TGSU 35-5	35.0	5.00	4.00	180.00	33.2	144.0
TGSU 35-6	35.0	6.00	5.20	180.00	33.2	144.0
TGSU 35-7	35.0	7.00	6.00	180.00	33.2	144.0
TGSU 35C-8	35.0	8.00	7.20	180.00	33.2	144.0
TGSU 35C-9	35.0	9.50	8.20	180.00	33.2	144.0
TGSU 56C-7	56.0	7.00	6.00	260.00	53.6	220.0
TGSU 56C-8	56.0	8.00	7.20	260.00	53.6	220.0
TGSU 56C-9	56.0	9.50	8.20	260.00	53.6	220.0