





GHDR/L-8A : External toolholders for turning, grooving and parting, with a hard layer coated upper jaw to sustain chip deflection.

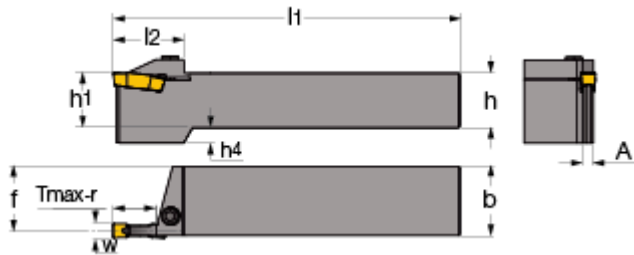

Right-hand shown



Designation	h	W min	W max	Tmax-r	b	l1	f	A	l2	h4	R / L
GHDL 25-8A	25.0	8.00	8.00	25.00	25.0	150.00	22.0	6.00	40.0	7.6	L
GHDR 25-8A	25.0	8.00	8.00	25.00	25.0	150.00	22.0	6.00	40.0	7.6	R
GHDL 32-8A	32.0	8.00	8.00	25.00	32.0	170.00	29.0	6.00	40.0	-	L
GHDR 32-8A	32.0	8.00	8.00	25.00	32.0	170.00	29.0	6.00	40.0	-	R