




PCHR/L-34 : PENTACUT holders for 5 edged inserts, used for grooving, parting and recessing.

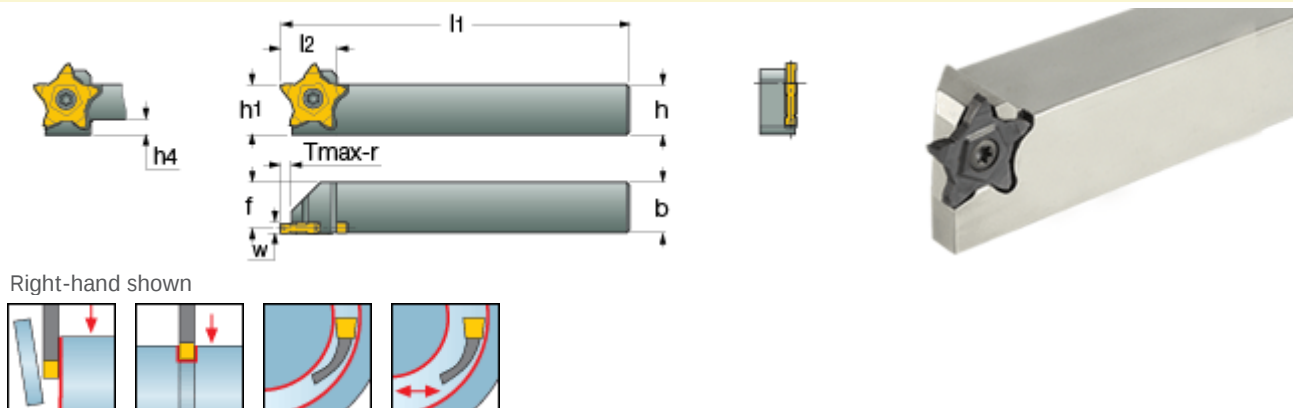

Designation	h	h1	b	W min	W max	f	l1	l2	h4	Tmax-r
PCHL 16-34	16.0	16.0	16.0	1.50	4.00	14.2	120.00	31.0	9.0	10.00
PCHR 16-34	16.0	16.0	16.0	1.50	4.00	14.2	120.00	31.0	9.0	10.00
PCHL 20-34	20.0	20.0	20.0	1.50	4.00	18.2	120.00	31.0	6.0	10.00
PCHR 20-34	20.0	20.0	20.0	1.50	4.00	18.2	120.00	31.0	6.0	10.00
PCHL 25-34	25.0	25.0	25.0	1.50	4.00	23.2	135.00	31.0	-	10.00
PCHR 25-34	25.0	25.0	25.0	1.50	4.00	23.2	135.00	31.0	-	10.00
PCHL 32-34	32.0	32.0	32.0	1.50	4.00	28.0	129.50	31.0	-	10.00
PCHR 32-34	32.0	32.0	32.0	1.50	4.00	28.0	129.50	31.0	-	10.00