





TGTR/L-2T..SH-L120 : Integral shank tools with a very rigid clamping. Enables machining at very high feed rates and provides excellent surface finish. Recommended for parting interrupted cuts. Excellent tool and pocket life.

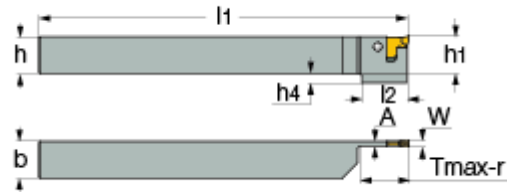

Right-hand shown



| Designation           | W    | W min | W max | h    | h1   | b    | A    | l1     | l2   | h4  | Tmax-r | D max |
|-----------------------|------|-------|-------|------|------|------|------|--------|------|-----|--------|-------|
| TGTR 1010-2T10SH-L120 | 2.00 | 1.80  | 2.50  | 10.0 | 10.1 | 10.0 | 1.65 | 120.00 | 15.0 | 5.0 | 10.00  | 26.0  |
| TGTL 1010-2T10SH-L120 | 2.00 | 1.80  | 2.50  | 10.0 | 10.1 | 10.0 | 1.65 | 120.00 | 15.0 | 5.0 | 10.00  | 26.0  |
| TGTR 1212-2T15SH-L120 | 2.00 | 1.80  | 2.50  | 12.0 | 12.1 | 12.0 | 1.65 | 120.00 | 15.0 | 3.0 | 15.00  | 30.0  |
| TGTL 1212-2T15SH-L120 | 2.00 | 1.80  | 2.50  | 12.0 | 12.1 | 12.0 | 1.65 | 120.00 | 15.0 | 3.0 | 15.00  | 30.0  |
| TGTR 1616-2T18SH-L120 | 2.00 | 1.80  | 2.50  | 16.0 | 16.1 | 16.0 | 1.65 | 120.00 | -    | -   | 18.00  | 36.0  |
| TGTL 1616-2T18SH-L120 | 2.00 | 1.80  | 2.50  | 16.0 | 16.1 | 16.0 | 1.65 | 120.00 | -    | -   | 18.00  | 36.0  |

Extractors (ETG 2 SH) should be ordered separately.  
For clamping and unclamping click on "More info"