





TGFH-S : Very rigid clamping. Enables machining at very high feed rates and provides excellent straightness and surface finish. Excellent life.

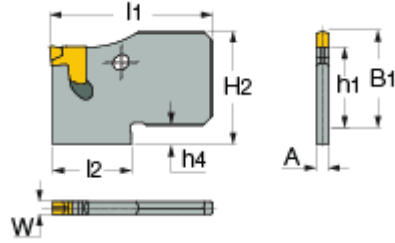

Designation	B1	W min	W max	A	l1	h1	H2	h4	D max
TGFH 19-2S	19.0	1.80	2.40	1.65	32.00	15.7	19.0	-	36.0
TGFH 19-3S	19.0	2.80	3.50	2.50	32.00	15.7	22.0	3.0	36.0