


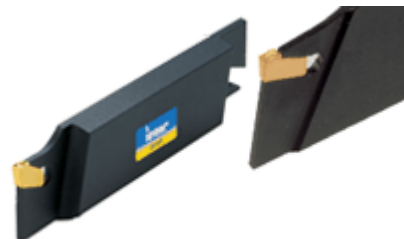




SGFHR/L-26T/32T : SELF-GRIP F-type double- and single-ended, reinforced holder blades for parting & grooving.

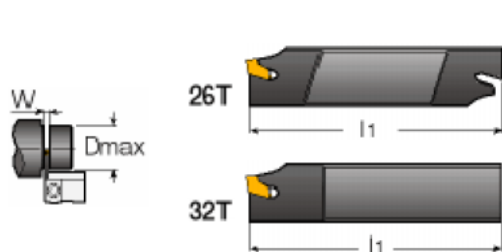

Right-hand shown



Designation	B1	W min	W max	A2	A	l1	h1	D max	Machines
SGFHL 26 T 16 - 1.6	26.0	1.60	1.60	8.0	1.20	110.00	21.4	30.0	TNS-30
SGFHR 26 T 16 - 1.6	26.0	1.60	1.60	8.0	1.20	110.00	21.4	30.0	TNS-30
SGFHL 26 T 16 - 2	26.0	1.80	2.69	8.0	1.60	110.00	21.4	30.0	TNS-30
SGFHR 26 T 16 - 2	26.0	1.80	2.69	8.0	1.60	110.00	21.4	30.0	TNS-30
SGFHL 26 T 16 - 3	26.0	2.70	3.53	8.0	2.40	110.00	21.4	30.0	TNS-30
SGFHR 26 T 16 - 3	26.0	2.70	3.53	8.0	2.40	110.00	21.4	30.0	TNS-30
SGFHL 26 T 23 - 1.6	26.0	1.60	1.60	8.0	1.20	110.00	21.4	42.0	TNS-30/42
SGFHR 26 T 23 - 1.6	26.0	1.60	1.60	8.0	1.20	110.00	21.4	42.0	TNS-30/42
SGFHL 26 T 23 - 2	26.0	1.80	1.60	8.0	1.20	110.00	21.4	42.0	TNS-30/112
SGFHR 26 T 23 - 2	26.0	1.80	2.69	8.0	1.60	110.00	21.4	42.0	TNS-30/112
SGFHL 26 T 23 - 3	26.0	2.70	3.53	8.0	2.40	110.00	21.4	42.0	TNS-30/42
SGFHR 26 T 23 - 3	26.0	2.70	3.53	8.0	2.40	110.00	21.4	42.0	TNS-30/42
SGFHL 26 T 23 - 4	26.0	3.54	4.52	8.0	3.40	110.00	21.4	42.0	TNS-30/42
SGFHR 26 T 23 - 4	26.0	3.54	4.52	8.0	3.40	110.00	21.4	42.0	TNS-30/42
SGFHL 32 T 22 - 2	32.0	1.80	2.69	8.0	1.60	110.00	24.8	42.0	TNS-42
SGFHR 32 T 22 - 2	32.0	1.80	2.69	8.0	1.60	110.00	24.8	42.0	TNS-42
SGFHL 32 T 22 - 3	32.0	2.70	3.53	8.0	2.40	110.00	24.8	42.0	TNS-42
SGFHR 32 T 22 - 3	32.0	2.70	3.53	8.0	2.40	110.00	24.8	42.0	TNS-42
SGFHL 32 T 33 - 3	32.0	2.70	3.53	8.0	2.40	110.00	24.8	60.0	TNS-42/60,TNS-65
SGFHR 32 T 33 - 3	32.0	2.70	3.53	8.0	2.40	110.00	24.8	60.0	TNS-42/60,TNS-65
SGFHL 32 T 33 - 4	32.0	3.54	4.52	8.0	3.40	110.00	24.8	60.0	TNS-42/60,TNS-65
SGFHR 32 T 33 - 4	32.0	3.54	4.52	8.0	3.40	110.00	24.8	60.0	TNS-42/60,TNS-65
SGFHR 32 T 41 - 4	32.0	3.54	4.52	10.0	3.40	110.00	24.8	80.0	TNS-65/80,TNA-480