




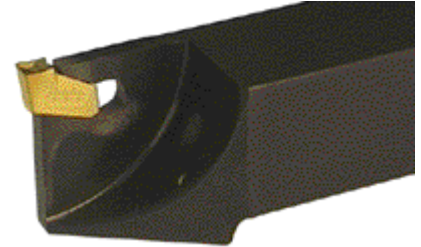

SGTFR / L-D : SELF-GRIP reinforced tool for parting & grooving.

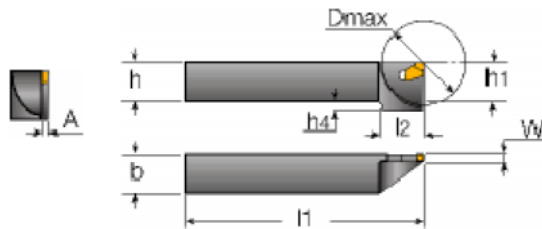

Right-hand shown



Left-hand shown

Designation	h	W min	W max	D max	h1	b	A	l1	l2	h4
SGTFL 1212-2D 30	12.0	1.80	2.69	30.0	12.0	12.0	1.70	150.00	17.0	4.0
SGTFR 1212-2D 30	12.0	1.80	2.69	30.0	12.0	12.0	1.70	150.00	17.0	4.0
SGTFR 1212-3D 32	12.0	2.70	3.53	32.0	12.0	12.0	2.40	150.00	18.0	6.0
SGTFL 1616-3D 35	16.0	2.70	3.35	35.0	16.0	16.0	2.40	110.00	18.0	4.0
SGTFR 1616-3D 35	16.0	2.70	3.35	35.0	16.0	16.0	2.40	110.00	18.0	4.0
SGTFL 1616-4D 35	16.0	3.54	4.52	35.0	16.0	16.0	3.30	110.00	18.0	4.0
SGTFR 1616-4D 35	16.0	3.54	4.52	35.0	16.0	16.0	3.30	110.00	18.0	4.0
SGTFL 2020-3D 45	20.0	2.70	3.53	45.0	20.0	20.0	2.40	125.00	23.0	5.0
SGTFR 2020-3D 45	20.0	2.70	3.53	45.0	20.0	20.0	2.40	125.00	23.0	5.0
SGTFL 2020-4D 45	20.0	3.54	4.52	45.0	20.0	20.0	3.30	125.00	23.0	5.0
SGTFR 2020-4D 45	20.0	3.54	4.52	45.0	20.0	20.0	3.30	125.00	23.0	5.0