





SGTHR/L : SELF-GRIP reinforced integral shank tool for parting and grooving.

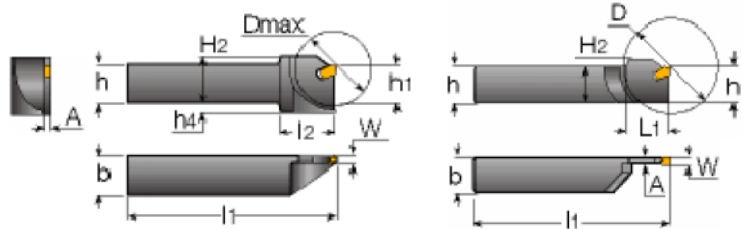

Left-hand shown



Right-hand shown



Designation	h	W min	W max	D max	h1	b	A	l1	l2	H2
SGTHL 10-2	10.0	2.00	2.40	28.0	10.0	10.0	1.60	86.00	18.0	19.0
SGTHL 12-2	12.0	2.00	2.40	30.0	12.0	10.0	1.60	110.00	18.0	19.0
SGTHR 12-2	12.0	2.00	2.40	30.0	12.0	10.0	1.60	110.00	18.0	19.0
SGTHL 12-3	12.0	3.10	3.10	32.0	12.0	10.0	2.40	110.00	21.0	21.0
SGTHR 12-3	12.0	3.10	3.10	32.0	12.0	10.0	2.40	110.00	21.0	21.0
SGTHL 16-2	16.0	2.00	2.40	30.0	16.0	10.0	1.60	110.00	18.0	19.0
SGTHR 16-2	16.0	2.00	2.40	30.0	16.0	10.0	1.60	110.00	18.0	19.0
SGTHL 16-3	16.0	3.10	3.10	32.0	16.0	12.0	2.40	110.00	20.0	24.0
SGTHR 16-3	16.0	3.10	3.10	32.0	16.0	12.0	2.40	110.00	20.0	24.0
SGTHR 16-4	16.0	4.10	4.10	34.0	16.0	12.0	3.20	110.00	21.0	24.0
SGTHL 2020-3	20.0	3.10	3.10	45.0	20.0	20.0	2.40	120.00	25.0	25.0
SGTHR 2020-3	20.0	3.10	3.10	45.0	20.0	20.0	2.40	120.00	25.0	25.0
SGTHL 2020-4	20.0	4.10	4.10	60.0	20.0	20.0	3.00	120.00	33.0	25.0
SGTHR 2020-4	20.0	4.10	4.10	60.0	20.0	20.0	3.00	120.00	33.0	25.0
SGTHL 2525-3	25.0	3.10	3.10	52.0	25.0	25.0	2.40	150.00	25.0	30.0
SGTHR 2525-3	25.0	3.10	3.10	52.0	25.0	25.0	2.40	150.00	25.0	30.0
SGTHL 2525-4	25.0	4.10	4.10	62.0	25.0	25.0	3.20	150.00	30.0	30.0
SGTHR 2525-4	25.0	4.10	4.10	62.0	25.0	25.0	3.20	150.00	30.0	30.0
SGTHL 2525-5	25.0	4.80	5.10	75.0	25.0	25.0	4.00	150.00	34.0	30.0
SGTHR 2525-5	25.0	4.80	5.10	75.0	25.0	25.0	4.00	150.00	34.0	30.0