





TGDR/L : Holders for TOP-GRIP utility grooving and turning inserts.

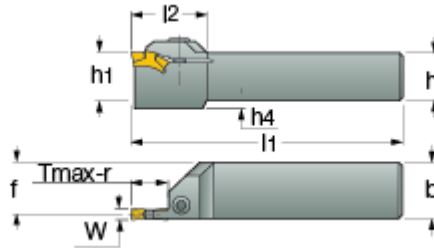

Right-hand shown



Designation	W min	W max	Tmax-r	h	h1	b	l1	l2	f	h4
TGDL 1616-3M	3.00	3.00	7.50	16.0	16.0	16.0	100.00	30.5	14.7	6.0
TGDR 1616-3M	3.00	3.00	7.50	16.0	16.0	16.0	100.00	30.5	14.7	6.0
TGDL 2020-3M	3.00	3.00	7.50	20.0	20.0	20.0	125.00	30.5	18.7	-
TGDR 2020-3M	3.00	3.00	7.50	20.0	20.0	20.0	125.00	30.5	18.7	-
TGDL 2525-3M	3.00	3.00	7.50	25.0	25.0	25.0	140.00	30.5	23.7	-
TGDR 2525-3M	3.00	3.00	7.50	25.0	25.0	25.0	140.00	30.5	23.7	-
TGDL 1616-4M	4.00	5.00	9.00	16.0	16.0	16.0	100.00	32.2	14.2	6.0
TGDR 1616-4M	4.00	5.00	9.00	16.0	16.0	16.0	100.00	32.2	14.2	6.0
TGDL 2020-4M	4.00	5.00	9.00	20.0	20.0	20.0	125.00	32.2	18.2	6.0
TGDR 2020-4M	4.00	5.00	9.00	20.0	20.0	20.0	125.00	32.2	18.2	6.0
TGDL 2525-4M	4.00	5.00	15.50	25.0	25.0	25.0	140.00	34.0	23.2	-
TGDR 2525-4M	4.00	5.00	15.50	25.0	25.0	25.0	140.00	34.0	23.2	-
TGDL 2525-5M	5.00	5.00	18.00	25.0	25.0	25.0	140.00	37.0	22.7	-
TGDR 2525-5M	5.00	5.00	18.00	25.0	25.0	25.0	140.00	37.0	22.7	-
TGDL 3232-5M	5.00	5.00	22.00	32.0	32.0	32.0	150.00	45.0	29.8	-
TGDR 3232-5M	5.00	5.00	22.00	32.0	32.0	32.0	150.00	45.0	29.8	-
TGDL 2525-6M	6.00	6.35	22.00	25.0	25.0	25.0	150.00	43.0	22.5	-
TGDR 2525-6M	6.00	6.35	22.00	25.0	25.0	25.0	150.00	43.0	22.5	-
TGDL 3232-6M	6.00	6.35	22.00	32.0	32.0	32.0	150.00	43.0	29.5	-
TGDR 3232-6M	6.00	6.35	22.00	32.0	32.0	32.0	150.00	43.0	29.5	-