
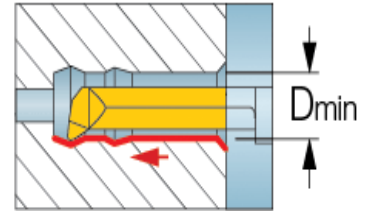


PICCO R/L 050, 053, 055 : Inserts for internal turning and chamfering

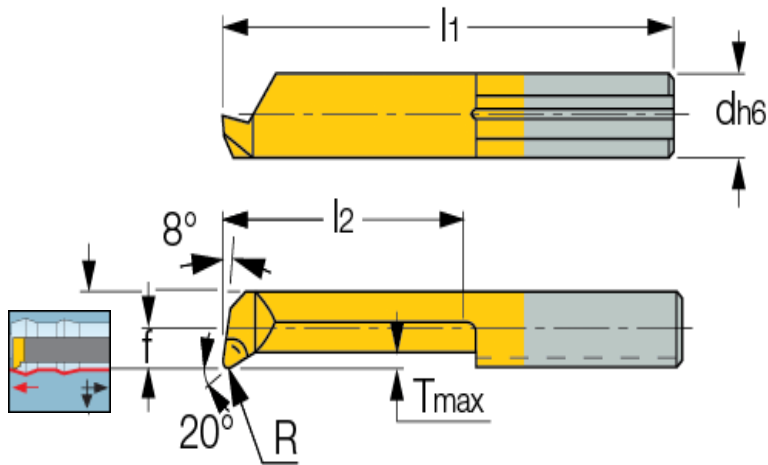

Designation	d	f	a	l1	l2	R?05	Tmax	D min	Grade
PICCO R 050.06-2	4	-	0.5	20	2	0.04	0.08	0.6	IC228IC908
PICCO R 050.06-3	4	-	0.5	20	3	0.04	0.08	0.6	IC228IC908
PICCO R 050.08-4	4	-	0.7	20	4	0.04	0.08	0.8	IC908
PICCO L 050.1-5	4	-	0.9	20	4.5	0.05	0.1	1	IC228IC908
PICCO R 050.1-5	4	-	0.9	20	4.5	0.05	0.1	1	IC228IC908
PICCO L 050.1-7	4	-	0.9	22	6.5	0.05	0.1	1	IC228IC908
PICCO R 050.1-7	4	-	0.9	22	6.5	0.05	0.1	1	IC228IC908
PICCO L 050.2-5	4	-	1.7	19	4	0.05	0.1	2	IC228IC908
PICCO R 050.2-5	4	-	1.7	19	4	0.05	0.1	2	IC228IC908
PICCO L 050.2-10	4	-	1.7	24	9	0.05	0.1	2	IC228IC908
PICCO R 050.2-10	4	-	1.7	24	9	0.05	0.1	2	IC228IC908
PICCO L 050.2-15	4	-	1.7	29	14	0.05	0.1	2	IC228IC908
PICCO R 050.2-15	4	-	1.7	29	14	0.05	0.1	2	IC228IC908
PICCO R 050.25-5	4	0.2	2.2	19	5	0.05	0.15	2.5	IC908
PICCO R 050.25-10	4	0.2	2.2	24	10	0.05	0.15	2.5	IC908
PICCO R 050.25-16	4	0.2	2.2	30	16	0.05	0.15	2.5	IC908
PICCO R 053.3-10	4	0.6	2.6	24	9	0.03	0.2	2.8	IC908
PICCO L 050.3-10	4	0.6	2.6	24	9	0.1	0.2	2.8	IC228IC908
PICCO R 050.3-10	4	0.6	2.6	24	9	0.1	0.2	2.8	IC228IC908
PICCO R 053.3-16	4	0.6	2.6	30	15	0.03	0.2	2.8	IC908
PICCO L 050.3-16	4	0.6	2.6	30	15	0.1	0.2	2.8	IC228IC908
PICCO R 050.3-16	4	0.6	2.6	30	15	0.1	0.2	2.8	IC228IC908
PICCO R 053.3-20	4	0.6	2.6	34	19	0.03	0.2	2.8	IC908
PICCO L 050.3-20	4	0.6	2.6	34	19	0.1	0.2	2.8	IC228IC908
PICCO R 050.3-20	4	0.6	2.6	34	19	0.1	0.2	2.8	IC228IC908
PICCO R 050.35-10	4	1.1	3.1	24	10	0.1	0.25	3.5	IC908
PICCO R 050.35-16	4	1.1	3.1	30	16	0.1	0.25	3.5	IC908
PICCO R 050.35-20	4	1.1	3.1	34	20	0.1	0.25	3.5	IC908
PICCO R 050.35-24	4	1.1	3.1	38	24	0.1	0.25	3.5	IC908

PICCO R 053.4-10	4	1.5	3.5	24	9	0.03	0.3	4	IC908
PICCO L 050.4-10	4	1.5	3.5	24	9	0.1	0.3	4	IC228IC908
PICCO R 050.4-10	4	1.5	3.5	24	9	0.1	0.3	4	IC228IC908
PICCO R 053.4-16	4	1.5	3.5	30	15	0.03	0.3	4	IC908
PICCO L 050.4-16	4	1.5	3.5	30	15	0.1	0.3	4	IC228IC908
PICCO R 050.4-16	4	1.5	3.5	30	15	0.1	0.3	4	IC228IC908
PICCO R 053.4-20	4	1.5	3.5	34	19	0.03	0.3	4	IC908
PICCO L 050.4-20	4	1.5	3.5	34	19	0.1	0.3	4	IC228IC908
PICCO R 050.4-20	4	1.5	3.5	34	19	0.1	0.3	4	IC228IC908
PICCO L 050.4-24	4	1.5	3.5	38	23	0.1	0.3	4	IC228IC908
PICCO R 050.4-24	4	1.5	3.5	38	23	0.1	0.3	4	IC228IC908
PICCO L 050.4-28	4	1.5	3.5	42	27	0.1	0.3	4	IC228IC908
PICCO R 050.4-28	4	1.5	3.5	42	27	0.1	0.3	4	IC228IC908
PICCO R 055.5-10	5	1.9	4.4	25	9	0.05	0.5	5	IC908
PICCO L 050.5-10	5	1.9	4.4	25	9	0.15	0.5	5	IC228IC908
PICCO R 050.5-10	5	1.9	4.4	25	9	0.15	0.5	5	IC228IC908
PICCO R 055.5-15	5	1.9	4.4	30	14	0.05	0.5	5	IC908
PICCO L 050.5-15	5	1.9	4.4	30	14	0.15	0.5	5	IC228IC908
PICCO R 050.5-15	5	1.9	4.4	30	14	0.15	0.5	5	IC228IC908
PICCO R 055.5-20	5	1.9	4.4	35	19	0.05	0.5	5	IC908
PICCO L 050.5-20	5	1.9	4.4	35	19	0.15	0.5	5	IC228IC908
PICCO R 050.5-20	5	1.9	4.4	35	19	0.15	0.5	5	IC228IC908
PICCO R 055.5-25	5	1.9	4.4	40	24	0.05	0.5	5	IC908
PICCO L 050.5-25	5	1.9	4.4	40	24	0.15	0.5	5	IC228IC908
PICCO R 050.5-25	5	1.9	4.4	40	24	0.15	0.5	5	IC228IC908
PICCO R 055.5-30	5	1.9	4.4	45	29	0.05	0.5	5	IC908
PICCO L 050.5-30	5	1.9	4.4	45	29	0.15	0.5	5	IC228IC908
PICCO R 050.5-30	5	1.9	4.4	45	29	0.15	0.5	5	IC228IC908
PICCO L 050.5-35	5	1.9	4.4	50	34	0.15	0.5	5	IC228IC908
PICCO R 050.5-35	5	1.9	4.4	50	34	0.15	0.5	5	IC228IC908
PICCO R 055.6-15	6	2.3	5.3	30	14	0.05	0.5	6	IC908
PICCO L 050.6-15	6	2.3	5.3	30	14	0.15	0.5	6	IC228IC908
PICCO R 050.6-15	6	2.3	5.3	30	14	0.15	0.5	6	IC228IC908
PICCO R 055.6-22	6	2.3	5.3	37	21	0.05	0.5	6	IC908
PICCO L 050.6-22	6	2.3	5.3	37	21	0.15	0.5	6	IC228IC908
PICCO R 050.6-22	6	2.3	5.3	37	21	0.15	0.5	6	IC228IC908
PICCO R 055.6-25	6	2.3	5.3	40	24	0.05	0.5	6	IC908
PICCO L 050.6-25	6	2.3	5.3	40	24	0.15	0.5	6	IC228IC908
PICCO R 050.6-25	6	2.3	5.3	40	24	0.15	0.5	6	IC228IC908
PICCO R 055.6-30	6	2.3	5.3	45	29	0.05	0.5	6	IC908
PICCO L 050.6-30	6	2.3	5.3	45	29	0.15	0.5	6	IC228IC908
PICCO R 050.6-30	6	2.3	5.3	45	29	0.15	0.5	6	IC228IC908
PICCO L 050.6-35	6	2.3	5.3	50	34	0.15	0.5	6	IC228IC908
PICCO R 050.6-35	6	2.3	5.3	50	34	0.15	0.5	6	IC228IC908
PICCO L 050.6-42	6	2.3	5.3	57	41	0.15	0.5	6	IC228IC908
PICCO R 050.6-42	6	2.3	5.3	57	41	0.15	0.5	6	IC228IC908
PICCO L 050.7-20	7	2.8	6.3	35	19	0.15	0.6	6.8	IC228IC908
PICCO R 050.7-20	7	2.8	6.3	35	19	0.15	0.6	6.8	IC228IC908
PICCO L 050.7-25	7	2.8	6.3	40	24	0.15	0.6	6.8	IC228IC908
PICCO R 050.7-25	7	2.8	6.3	40	24	0.15	0.6	6.8	IC228IC908

PICCO L 050.7-30	7	2.8	6.3	45	29	0.15	0.6	6.8	IC228IC908
PICCO R 050.7-30	7	2.8	6.3	45	29	0.15	0.6	6.8	IC228IC908
PICCO L 050.7-35	7	2.8	6.3	50	34	0.15	0.6	6.8	IC228IC908
PICCO R 050.7-35	7	2.8	6.3	50	34	0.15	0.6	6.8	IC228IC908
PICCO L 050.7-40	7	2.8	6.3	55	39	0.15	0.6	6.8	IC228IC908
PICCO R 050.7-40	7	2.8	6.3	55	39	0.15	0.6	6.8	IC228IC908
PICCO L 050.7-45	7	2.8	6.3	60	44	0.15	0.6	6.8	IC228IC908
PICCO R 050.7-45	7	2.8	6.3	60	44	0.15	0.6	6.8	IC228IC908
PICCO R 050.7-50	6	2.8	6.3	65	49	0.15	0.6	6.8	IC908
PICCO L 050.7-50	7	2.8	6.3	65	49	0.15	0.6	6.8	IC228IC908
PICCO R 050.7-50	7	2.8	6.3	65	49	0.15	0.6	6.8	IC228